



HUAWEI MU509 Series HSDPA LGA Module

## **Hardware Guide**

Issue 06

Date 2012-12-19

Huawei Technologies Co., Ltd. provides customers with comprehensive technical support and service. For any assistance, please contact our local office or company headquarters.

## Huawei Technologies Co., Ltd.

Huawei Industrial Base, Bantian, Longgang, Shenzhen 518129, People's Republic of China

Tel: +86-755-28780808 Global Hotline: +86-755-28560808 Website: [www.huawei.com](http://www.huawei.com)

E-mail: [mobile@huawei.com](mailto:mobile@huawei.com)

Please refer color and shape to product. Huawei reserves the right to make changes or improvements to any of the products without prior notice.

### **Copyright © Huawei Technologies Co., Ltd. 2012. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

The product described in this manual may include copyrighted software of Huawei Technologies Co., Ltd and possible licensors. Customers shall not in any manner reproduce, distribute, modify, decompile, disassemble, decrypt, extract, reverse engineer, lease, assign, or sublicense the said software, unless such restrictions are prohibited by applicable laws or such actions are approved by respective copyright holders under licenses.

### **Trademarks and Permissions**



**HUAWEI**, **HUAWEI**, and are trademarks or registered trademarks of Huawei Technologies Co., Ltd.

Other trademarks, product, service and company names mentioned are the property of their respective owners.

### **Notice**

Some features of the product and its accessories described herein rely on the software installed, capacities and settings of local network, and may not be activated or may be limited by local network operators or network service providers, thus the descriptions herein may not exactly match the product or its accessories you purchase.

Huawei Technologies Co., Ltd reserves the right to change or modify any information or specifications contained in this manual without prior notice or obligation.

### **NO WARRANTY**

THE CONTENTS OF THIS MANUAL ARE PROVIDED "AS IS". EXCEPT AS REQUIRED BY APPLICABLE LAWS, NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE MADE IN RELATION TO THE ACCURACY, RELIABILITY OR CONTENTS OF THIS MANUAL.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO CASE SHALL HUAWEI TECHNOLOGIES CO., LTD BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, OR LOST PROFITS, BUSINESS, REVENUE, DATA, GOODWILL OR ANTICIPATED SAVINGS.

### **Import and Export Regulations**

Customers shall comply with all applicable export or import laws and regulations and will obtain all necessary governmental permits and licenses in order to export, re-export or import the product mentioned in this manual including the software and technical data therein.



# About This Document

## Revision History

Document Version	Date	Chapter	Descriptions
01	2010-11-12		Creation
02	2011-04-18	1	Updated 'Overview'
		2.2	Updated 'Table 2-1 Feature'
		2.4	Updated '2.4 Application Block Diagram'
		3.1	Updated '3.1 About This Chapter'
		3.2	Updated 'Table 3-1 Definitions of pins on the LGA interface'
		3.3.1	Updated '3.3.1 Overview'
		3.3.2	Updated '3.3.2 VBAT Interface'
		3.3.3	Updated '3.3.3 VCOIN Interface'
		3.4	Updated '3.4 Signal Control Interface'
		3.5	Updated '3.5 UART Interface'
		3.6	Added '3.6 USB Interface'
		3.7	Updated '3.7 SIM Card Interface'
		3.8	Updated '3.8 Audio Interface'
		3.9	Added '3.9 General Purpose I/O Interface'
		3.10	Added '3.10 JTAG Interface'
		3.11	Added '3.11 RF Antenna Interface'
		3.12	Added '3.12 NC Pins'
		4.2	Added '4.2 Antenna Installation Guidelines'
		4.5.1	Updated '4.5.1 Conducted Receive Sensitivity'
		4.5.2	Updated '4.5.2 Conducted Transmit Power'



Document Version	Date	Chapter	Descriptions
		5.5.2	Updated '5.5.2 Power Consumption'
		6.2	Updated '6.2 Dimensions and interfaces of MU509'
		6.3	Added '6.3 Customer PCB Pad Design'
		6.4	Updated '6.4 Label'
		7	Added '7 Certifications'
		8	Added '8 Safety Information'
		9	Added '9 Appendix A Circuit of Typical Interface'
		10	Updated '10 Appendix B Acronyms and Abbreviations'
03	2011-07-08	2.3	Updated the Figure 2-1
		3.3.2	Replaced '2 mF' with '2.2 mF'
		3.4.2	Updated the Figure 3-5 and the Figure 3-6
		3.6	Updated the Table 3-10
		3.7	Updated the Figure 3-16 and the Figure 3-18
		9	Updated the two figures
04	2012-04-23	3.7.2	Updated the value of the resistor which is used to connect the SIM_DATA pin to the VSIM pin.
		5.5.2	Updated the Table 5-7
		5.5.2	Added the Table 5-9 "DC power consumption for MU509-c(GSM/GPRS/EDGE)"
		7.2	Updated the Table 7-1
05	2012-08-27	All	Added the content of MU509-g
		2.2	Added A-tick in Table 2-1
		3.4.1	Updated the description of WAKEUP_IN in Table 3-5
		3.4.4	Updated the description of WAKEUP_IN Signal
		3.4.5	Updated the description of WAKEUP_OUT Signal



Document Version	Date	Chapter	Descriptions
		5.5.2	Update Table 5-6 DC power consumption (Power off mode and Standby mode) and Table 5-7 DC power consumption (Idle mode)
		6	Added the process design
		7	Updated the CE number
06	2012-12-19	All	Added the related content about HUAWEI MU509-1
		3.3.2	Updated the peak current to 2.75 V and the storage capacitors to 220 $\mu$ F
		3.3.2	Updated Figure 3-2 Recommended power circuit of MU509 module
		3.4.2	Updated Table 3-7 Power off timing
		3.4.4	Updated Figure 3-13 WAKEUP_IN sequence
		3.5.2	Added the description of level conversion circuit and the wind blow in

## Scope

MU509-b  
MU509-c  
MU509-g  
HUAWEI MU509-1

## Summary

This document provides information about the major functions, supported services, system architecture, and technical references of HUAWEI MU509 HSDPA LGA Module.

The following table lists the contents of this document.

Chapter	Details
1 Introduction	Describes the short introduction of the product.



Chapter	Details
2 Overall Description	Describes the Function overview, Circuit Block Diagram and Application Block Diagram of the product.
3 Description of the Application Interfaces	Describes the external application interfaces of the product.
4 RF Specifications	Describes the RF specifications of the product.
5 Electrical and Reliability Features	Describes the electrical and reliability features of the interfaces in the product.
6 Process Design	Describes the process design, the Dimension, Label and Packing System of the product.
7 Certifications	Describes the certifications of the product.
8 Safety Information	Lists the safety information when using the product.
8 Appendix A Circuit of Typical Interface	Lists the circuit of typical interface of the product.
10 Appendix B Acronyms and Abbreviations	Lists the acronyms and abbreviations mentioned in this document.



# Contents

---

<b>1 Introduction</b> .....	<b>10</b>
<b>2 Overall Description</b> .....	<b>11</b>
2.1 About This Chapter.....	11
2.2 Function Overview.....	11
2.3 Circuit Block Diagram.....	13
2.4 Application Block Diagram .....	15
<b>3 Description of the Application Interfaces</b> .....	<b>16</b>
3.1 About This Chapter.....	16
3.2 LGA Interface .....	16
3.3 Power Interface .....	25
3.3.1 Overview.....	25
3.3.2 VBAT Interface.....	26
3.3.3 VCOIN Interface .....	27
3.3.4 Output Power Supply Interface .....	29
3.4 Signal Control Interface.....	29
3.4.1 Overview.....	29
3.4.2 Input Signal Control Pins .....	30
3.4.3 Output Signal Control Pin .....	33
3.4.4 WAKEUP_IN Signal.....	36
3.4.5 WAKEUP_OUT Signal.....	37
3.5 UART Interface.....	38
3.5.1 Overview.....	38
3.5.2 Circuit Recommended for the UART Interface.....	39
3.6 USB Interface .....	39
3.7 SIM Card Interface .....	41
3.7.1 Overview.....	41
3.7.2 Circuit Recommended for the SIM Card Interface .....	41
3.7.3 ESD Protection for the SIM Card Interface .....	43
3.8 Audio Interface .....	43
3.8.1 Analogue Audio.....	43
3.8.2 Digital Audio.....	45
3.8.3 Primary Mode .....	46



3.9 General Purpose I/O Interface .....	46
3.10 JTAG Interface .....	47
3.11 RF Antenna Interface.....	47
3.12 NC Pins .....	48
<b>4 RF Specifications.....</b>	<b>49</b>
4.1 About This Chapter.....	49
4.2 Antenna Installation Guidelines.....	49
4.3 Operating Frequencies.....	49
4.4 Conducted RF Measurement.....	50
4.4.1 Test Environment.....	50
4.4.2 Test Standards.....	50
4.5 Conducted Rx Sensitivity and Tx Power.....	50
4.5.1 Conducted Receive Sensitivity.....	50
4.5.2 Conducted Transmit Power .....	51
4.6 Antenna Design Requirements .....	52
4.6.1 Antenna Design Indicators.....	52
4.6.2 Interference .....	54
4.6.3 GSM/WCDMA Antenna Requirements.....	54
4.6.4 Radio Test Environment .....	55
<b>5 Electrical and Reliability Features .....</b>	<b>56</b>
5.1 About This Chapter.....	56
5.2 Extreme Operating Conditions .....	56
5.3 Operating and Storage Temperatures and Humidity.....	57
5.4 Electrical Features of Application Interfaces .....	57
5.5 Power Supply Features.....	58
5.5.1 Input Power Supply .....	58
5.5.2 Power Consumption .....	59
5.6 Reliability Features.....	68
5.7 EMC and ESD Features.....	69
<b>6 Process Design .....</b>	<b>71</b>
6.1 About This Chapter.....	71
6.2 Storage Requirement .....	71
6.3 Moisture Sensitivity .....	71
6.4 Dimensions and interfaces .....	72
6.5 Packaging.....	73
6.6 Label.....	75
6.7 Customer PCB Design .....	77
6.7.1 PCB Surface Finish .....	77
6.7.2 PCB Pad Design.....	77
6.7.3 Solder Mask.....	77
6.7.4 Requirements on PCB Layout.....	78



6.8 Assembly Processes .....	78
6.8.1 General Description of Assembly Processes .....	78
6.8.2 Stencil Design.....	78
6.8.3 Reflow Profile .....	79
6.9 Specification of Rework.....	81
6.9.1 Process of Rework .....	81
6.9.2 Preparations of Rework .....	81
6.9.3 Removing of the Module.....	81
6.9.4 Welding Area Treatment.....	82
6.9.5 Module Installation.....	82
6.9.6 Specifications of Rework .....	83
<b>7 Certifications.....</b>	<b>84</b>
7.1 About This Chapter.....	84
7.2 Certifications.....	84
<b>8 Safety Information.....</b>	<b>85</b>
8.1 Interference .....	85
8.2 Medical Device .....	85
8.3 Area with Inflammables and Explosives.....	85
8.4 Traffic Security.....	86
8.5 Airline Security.....	86
8.6 Safety of Children.....	86
8.7 Environment Protection.....	86
8.8 WEEE Approval.....	86
8.9 RoHS Approval.....	86
8.10 Laws and Regulations Observance .....	87
8.11 Care and Maintenance .....	87
8.12 Emergency Call .....	87
8.13 Specific Absorption Rate (SAR) .....	87
8.14 Regulatory Information .....	88
8.14.1 CE Approval (European Union) .....	88
8.14.2 FCC Statement.....	88
<b>9 Appendix A Circuit of Typical Interface.....</b>	<b>89</b>
<b>10 Appendix B Acronyms and Abbreviations .....</b>	<b>91</b>



# 1 Introduction

This document describes the hardware application interfaces and air interfaces that are provided when the HUAWEI MU509 HSDPA LGA Module (hereinafter referred to as the MU509 module) is used.

This document helps you to understand the interface specifications, electrical features, and related product information of the MU509 module.

MU509 module is related to the following products:

Product name	Model name	Description
MU509	MU509-b	UMTS/HSDPA 2100/900 MHz GSM/GPRS/EDGE 850/900/1800/1900 MHz
	MU509-c	UMTS/HSDPA 1900/850 MHz GSM/GPRS/EDGE 850/900/1800/1900 MHz
	MU509-g	UMTS/HSDPA 2100/850 MHz GSM/GPRS/EDGE 850/900/1800/1900 MHz
	HUAWEI MU509-1	UMTS/HSDPA 2100 MHz GSM/GPRS/EDGE 850/900/1800/1900 MHz

Each product has two editions: Data only or Telematics. Data only does not support the voice function.

	Data only	Telematics
Analog voice input function	✗	✓
Analog voice output function	✗	✓
PCM voice function	✗	✓



# 2 Overall Description

## 2.1 About This Chapter

This chapter gives a general description of the MU509 module and provides:

- Function Overview
- Circuit Block Diagram
- Application Block Diagram

## 2.2 Function Overview

**Table 2-1** Feature

Feature	Description
Physical Features	<ul style="list-style-type: none"><li>• Dimensions (L × W × H): 30 mm × 30 mm × 2.6 mm</li><li>• Weight: about 5.5 g</li></ul>
Working Bands	<ul style="list-style-type: none"><li>• MU509-b: UMTS2100/900 MHz GSM850/900/1800/1900 MHz (Data only or Telematics)</li><li>• MU509-c: UMTS1900/850 MHz GSM850/900/1800/1900 MHz (Data only or Telematics)</li><li>• MU509-g: UMTS2100/850 MHz GSM850/900/1800/1900 MHz (Data only or Telematics)</li><li>• HUAWEI MU509-1: UMTS 2100MHz GSM/GPRS/EDGE 850/900/1800/1900 MHz (Data only or Telematics)</li></ul> <p>For the differences between Data only and Telematics, see "Chapter 1".</p>
Operating Temperature	<p>Normal working temperature: -20°C to +70°C</p> <p>Extreme working temperatures: -30°C to -20°C and +70°C to +75°C</p>



Feature	Description
Ambient Temperature for Storage	-40°C to +85°C
Power Voltage	3.3 V to 4.2 V (3.8 V is recommended.)
AT Commands	For MU509-b, MU509-g and HUAWEI MU509-1, see the <a href="#">HUAWEI MU509 HSDPA LGA Module AT Command Interface Specification</a> . For MU509-c, see the <a href="#">HUAWEI MU509-c HSDPA LGA Module AT Command Interface Specification</a> .
Application Interface (145-pin LGA interface)	Universal Asynchronous Receiver-Transmitter (UART) Supporting 8-wire UART  One standard Universal Subscriber Identity Module (USIM) card (3 V or 1.8 V)  Audio (optional): (only Telematics version supports these functions) For detailed information about the working bands supported, see "Chapter 1". <ul style="list-style-type: none"><li>• 2×Micphone in</li><li>• 1×Handset out</li><li>• 1×Speaker out</li><li>• 1×PCM</li></ul> USB 2.0 (full speed) Power on/off Reset Wakeup_In Wakeup_Out Light-emitting Diode (LED) Configurable General-purpose I/O (GPIO) RF pad Power
SMS	New message alert, text message receiving, and text message sending  Management of text messages: read messages, delete messages, storage status, and message list  Support for the Protocol Data Unit (PDU) mode
Data Services	GSM CS: UL 14.4 kbps/DL 14.4 kbps

Feature	Description
	GPRS: UL 85.6 kbps/DL 85.6 kbps
	EDGE: DL 236.8 kbps/UL: 236.8 kbps
	WCDMA CS: UL 64 kbps/DL 64 kbps
	WCDMA PS: UL 384 kbps/DL 384 kbps
	HSDPA: DL 3.6 Mbps
Internet Protocols	TCP/IP, UDP/IP, PPP protocol
Applications	<ul style="list-style-type: none"><li>• SVD (Simultaneous Voice and Data), only for 3G.</li><li>• SIM PBM (Phone Book Management)</li></ul>
Certification Information	<ul style="list-style-type: none"><li>• Restriction of the use of certain Hazardous Substances (RoHS)</li><li>• European Conformity (CE)</li><li>• Federal Communications Commission (FCC)</li><li>• Globe Certification Forum (GCF)</li><li>• PCS Type Certification Review Board (PTCRB)</li><li>• China Compulsory Certification (3C)</li><li>• A-tick</li></ul>

 **NOTE**


The certifications of different type of MU509 module are different because of sale markets. To get the details, please refer to "Chapter 7".

## 2.3 Circuit Block Diagram

Figure 2-1 shows the circuit block diagram of the MU509 module. The application block diagram and major functional units of the MU509 module contain the following parts:

- Baseband controller
- Power manager
- Multi-chip package (MCP) memory
- Radio frequency (RF) transceiver
- RF interface
- RF PA

**Figure 2-1** Circuit block diagram of the MU509 module

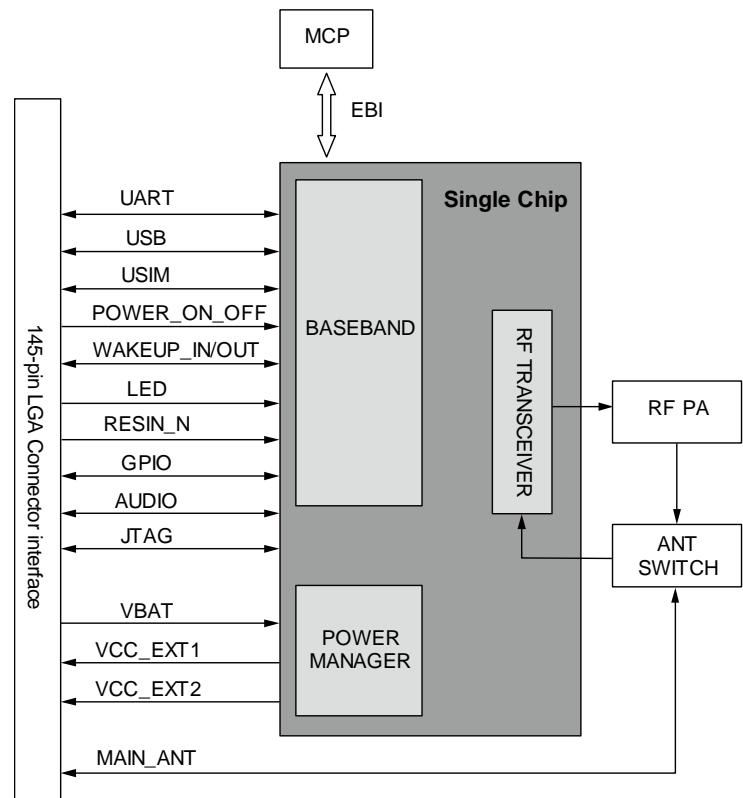


**NOTE**

Only telematics version supports the audio function.

## 2.4 Application Block Diagram

**Figure 2-2** Application block diagram of the MU509 module

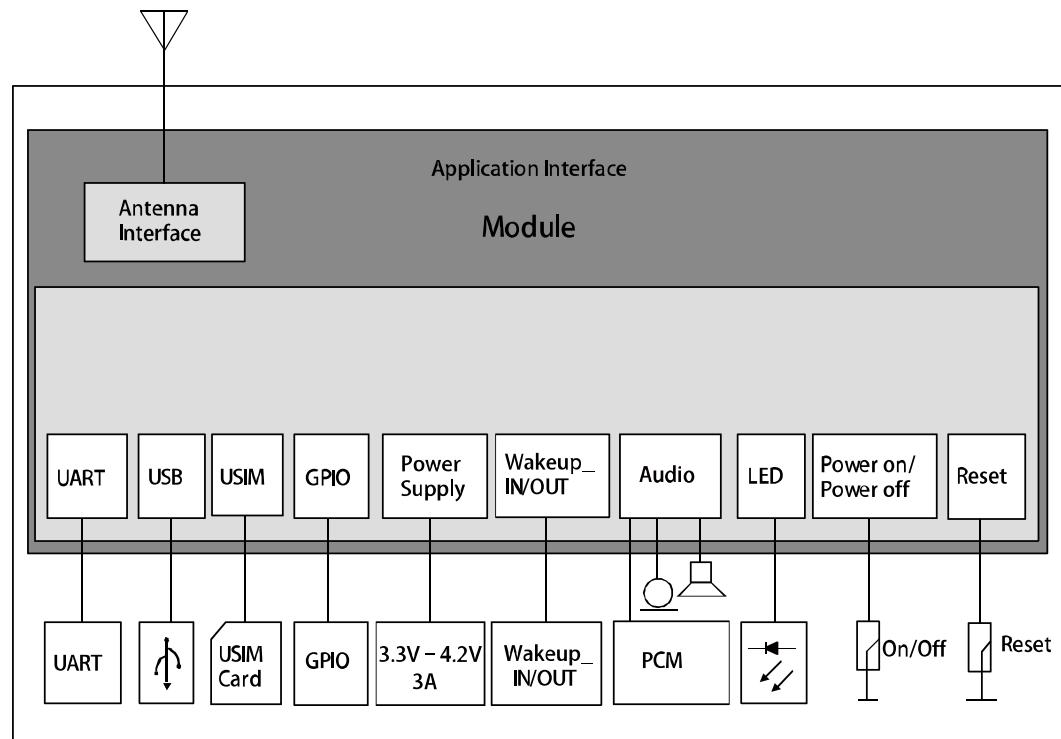

**UART Interface** The module supports 3-line or 5-line or full serial port interface.

**USB Interface** The USB interface supports USB 2.0 full speed standard.

**USIM Interface** The USIM interface provides the interface for a USIM card. The USIM card can be inserted into the host side.

**Power Supply** DC 3.8 V is recommended.

**Audio Interface** The module supports one speaker output, two microphone input, one earpiece output and one PCM interface (only telematics version supports the audio function).

**RF Pad** RF antenna interface

# 3

# Description of the Application Interfaces

## 3.1 About This Chapter

This chapter mainly describes the external application interfaces of the MU509 module, including:

- LGA Interface
- Power Interface
- Signal Control Interface
- UART Interface
- USB Interface
- SIM Card Interface
- Audio Interface
- General Purpose I/O Interface
- JTAG Interface
- RF Antenna Interface
- NC Pins

## 3.2 LGA Interface

The MU509 module uses a 145-pin LGA as its external interface. For details about the module and dimensions of the LGA, see “6.4 Dimensions and interfaces”.

If DTE supports other Huawei LGA modules, such as modules with system of CDMA, TD-SCDMA or WCDMA, please refer to [HUAWEI LGA Module Hardware Migration Guide](#).

Table 3-1 shows the definitions of pins on the 145-pin signal interface of the MU509 module.



**Table 3-1** Definitions of pins on the LGA interface

PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
1	NC	-	-	Not connected, please keep this pin open	-	-	-
2	NC	-	-	Not connected, please keep this pin open	-	-	-
3	NC	-	-	Not connected, please keep this pin open	-	-	-
4	NC	-	-	Not connected, please keep this pin open	-	-	-
5	PCM_SYNC	-	O	PCM interface sync	-0.3	2.6	2.9
6	PCM_DIN	-	I	PCM I/F data in	-0.3	2.6	2.9
7	PCM_DOUT	-	O	PCM I/F data out	-0.3	2.6	2.9
8	PCM_CLK	-	O	PCM interface clock	-0.3	2.6	2.9
9	NC	-	-	Not connected, please keep this pin open	-	-	-
10	NC	-	-	Not connected, please keep this pin open	-	-	-
11	WAKEUP_IN	-	I	Host to set the module into sleep or wake up the module from sleep.	-0.3	2.6	2.9
12	VBAT	-	P	Power supply input	3.3	3.8	4.2
13	VBAT	-	P	Power supply input	3.3	3.8	4.2
14	PS_HOLD	-	I	Used for JTAG interface assigning a test point for it.	-	1.8	-
15	Reserved	-	-		-	-	-
16	NC	-	-	Not connected, please keep this pin open	-	-	-
17	NC	-	-	Not connected, please keep open	-	-	-
18	NC	-	-	Not connected, please keep this pin open	-	-	-
19	NC	-	-	Not connected, please keep this pin open	-	-	-
20	NC	-	-	Not connected, please keep this pin open	-	-	-



PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
21	NC	-	-	Not connected, please keep this pin open	-	-	-
22	NC	-	-	Not connected, please keep this pin open	-	-	-
23	NC	-	-	Not connected, please keep this pin open	-	-	-
24	NC	-	-	Not connected, please keep this pin open	-	-	-
25	NC	-	-	Not connected, please keep this pin open	-	-	-
26	NC	-	-	Not connected, please keep this pin open	-	-	-
27	NC	-	-	Not connected, please keep this pin open	-	-	-
28	Reserved	-	-		-	-	-
29	Reserved	-	-		-	-	-
30	JTAG_TMS	-	I	JTAG Test mode select	-	-	-
31	VCC_EXT2	-	P	2.6 V POWER output	-	2.6	-
32	VCC_EXT1	-	P	1.8 V POWER output	-	1.8	-
33	NC	-	-	Not connected, please keep this pin open	-	-	-
34	SIM_VCC	-	P	Power supply for SIM card	-	1.8/2.85	-
35	VCOIN	-	P	Coin cell input	1.5	3.0	3.25
36	JTAG_TRST_N	-	I	JTAG reset	-	-	-
37	NC	-	-	Not connected, please keep this pin open	-	-	-
38	MIC2_P	-	I	(Only telematics version supports audio function, Data only version does not support this function) Positive pole of the input of audio interface 2	-	-	-
39	MIC2_N	-	I	(Only telematics version supports audio function, Data only version does not support this function) Negative pole of the input of audio interface 2	-	-	-



PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
40	MIC1_P	-	I	(Only telematics version supports audio function , Data only version does not support this function) Positive pole of the input of audio interface 1	-	-	-
41	MIC1_N	-	I	(Only telematics version supports audio function , Data only version does not support this function) Negative pole of the input of audio interface 1	-	-	-
42	JTAG_TCK	-	I	JTAG clock input	-0.3	1.8	2.1
43	Reserved	-	-		-	-	-
44	GPIO	-	I/O	General I/O pin. The function of these pins has not been defined.	-0.3	2.6	2.9
45	GPIO	-	I/O	General I/O pin. The function of these pins has not been defined.	-0.3	2.6	2.9
46	GPIO	-	I/O	General I/O pins. The function of these pins has not been defined.	-0.3	2.6	2.9
47	NC	-	-	Not connected, please keep this pin open	-	-	-
48	GND	-	-	Ground	-	-	-
49	GND	-	-	Ground	-	-	-
50	GND	-	-	Ground	-	-	-
51	GPIO	-	I/O	General I/O pins. The function of these pins has not been defined.	-0.3	2.6	2.9
52	GND	-	-	Ground	-	-	-
53	GND	-	-	Ground	-	-	-
54	GND	-	-	Ground	-	-	-
55	GPIO	-	I/O	General I/O pins. The function of these pins has not been defined.	-0.3	2.6	2.9
56	GND	-	-	Ground	-	-	-



PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
57	GND	-	-	Ground	-	-	-
58	GND	-	-	Ground	-	-	-
59	GND	-	-	Ground	-	-	-
60	NC	-	-	Not connected, please keep this pin open	-	-	-
61	NC	-	-	Not connected, please keep this pin open	-	-	-
62	NC	-	-	Not connected, please keep this pin open	-	-	-
63	NC	-	-	Not connected, please keep this pin open	-	-	-
64	NC	-	-	Not connected, please keep this pin open	-	-	-
65	NC	-	-	Not connected, please keep this pin open	-	-	-
66	NC	-	-	Not connected, please keep this pin open	-	-	-
67	NC	-	-	Not connected, please keep this pin open	-	-	-
68	NC	-	-	Not connected, please keep this pin open	-	-	-
69	NC	-	-	Not connected, please keep this pin open	-	-	-
70	NC	-	-	Not connected, please keep this pin open	-	-	-
71	WAKEUP_OUT	-	O	Module to wake up the host	-0.3	2.6	2.9
72	JTAG_TDO	-	O	JTAG test data output	-0.3	1.8	2.1
73	UART_DSR	-	O	UART Data Set Ready	-0.3	2.6	2.9
74	UART_RTS	-	O	UART Ready for receive	-0.3	2.6	2.9
75	UART_DCD	-	O	UART Data Carrier Detect	-0.3	2.6	2.9
76	UART_TX	-	O	UART transmit output	-0.3	2.6	2.9
77	UART_RING	-	O	UART Ring Indicator	-0.3	2.6	2.9
78	UART_RX	-	I	UART receive data input	-0.3	2.6	2.9
79	UART_DTR	-	I	Data Terminal Ready	-0.3	2.6	2.9



PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
80	UART_CTS	-	I	UART Clear to Send	-0.3	2.6	2.9
81	POWER_ON_OFF	-	I	System power-on or power-off	-	Pulled up on chip	-
82	NC	-	-	Not connected, please keep this pin open	-	-	-
83	NC	-	-	Not connected, please keep this pin open	-	-	-
84	NC	-	-	Not connected, please keep this pin open	-	-	-
85	USB_DM	-	I/O	Full-speed USB D-	-	-	-
86	USB_DP	-	I/O	Full-speed USB D+	-	-	-
87	JTAG_TDI	-	I	JTAG test data input	-0.3	1.8	2.1
88	SIM_RESET	-	O	SIM reset	-0.3	1.8/2.85	2.1/3.15
89	SIM_DATA	-	I/O	SIM data	-0.3	1.8/2.85	2.1/3.15
90	SIM_CLK	-	O	SIM clock	-0.3	1.8/2.85	2.1/3.15
91	LED_STATUS	-	I	Status indicator Current sink Drive strength: 10 mA	-	-	-
92	NC	-	-	Not connected, please keep this pin open	-	-	-
93	JTAG_RTCK	-	I	JTAG return clock	-0.3	1.8	2.1
94	NC	-	-	Not connected, please keep this pin open	-	-	-
95	NC	-	-	Not connected, please keep this pin open	-	-	-
96	EAR_OUT_N	-	O	(Only telematics version supports audio function , Data only version does not support this function) Negative pole of the output of Earphone interface	-	-	-
97	EAR_OUT_P	-	O	(Only telematics version supports audio function , Data only version does not support this function) Positive pole of the output of Earphone interface	-	-	-



PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
98	SPKR_OUT_P	-	O	(Only telematics version supports audio function, Data only version does not support this function) Positive pole of the output of speaker interface	-	-	-
99	SPKR_OUT_N	-	O	(Only telematics version supports audio function, Data only version does not support this function) Negative pole of the output of speaker interface	-	-	-
100	RESIN_N	-	I	Reset module.	-0.3	1.8	2.1
101	LED_MODE	-	I	Mode indicator Current sink Drive strength: 10 mA	-	-	-
102	NC	-	-	Not connected, please keep this pin open	-	-	-
103	NC	-	-	Not connected, please keep this pin open	-	-	-
104	NC	-	-	Not connected, please keep this pin open	-	-	-
105	GPIO	-	I/O	General I/O pins. The function of these pins has not been defined.	-0.3	2.6	2.9
106	GND	-	-	Ground	-	-	-
107	MAIN_ANT	-	-	RF main antenna interface	-	-	-
108	GND	-	-	Ground	-	-	-
109	GPIO	-	I/O	General I/O pins. The function of these pins has not been defined	-0.3	2.6	2.9
110	GND	-	-	Ground	-	-	-
111	NC	-	-	Not connected, please keep this pin open	-	-	-
112	GND	-	-	Ground	-	-	-
113	GPIO	-	I/O	General I/O pins. The function of these pins has not been defined	-0.3	2.6	2.9
114	GND	-	-	Ground	-	-	-



PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
115	NC	-	-	Not connected, please keep this pin open	-	-	-
116	GND	-	-	Ground	-	-	-
117	NC	-	-	Not connected, please keep this pin open	-	-	-
118	NC	-	-	Not connected, please keep this pin open	-	-	-
119	NC	-	-	Not connected, please keep this pin open	-	-	-
120	NC	-	-	Not connected, please keep this pin open	-	-	-
121	GND	-	-	Thermal Ground Pad	-	-	-
122	GND	-	-	Thermal Ground Pad	-	-	-
123	GND	-	-	Thermal Ground Pad	-	-	-
124	GND	-	-	Thermal Ground Pad	-	-	-
125	GND	-	-	Thermal Ground Pad	-	-	-
126	GND	-	-	Thermal Ground Pad	-	-	-
127	GND	-	-	Thermal Ground Pad	-	-	-
128	GND	-	-	Thermal Ground Pad	-	-	-
129	GND	-	-	Thermal Ground Pad	-	-	-
130	GND	-	-	Thermal Ground Pad	-	-	-
131	GND	-	-	Thermal Ground Pad	-	-	-
132	GND	-	-	Thermal Ground Pad	-	-	-
133	GND	-	-	Thermal Ground Pad	-	-	-
134	GND	-	-	Thermal Ground Pad	-	-	-
135	GND	-	-	Thermal Ground Pad	-	-	-
136	GND	-	-	Thermal Ground Pad	-	-	-
137	GND	-	-	Thermal Ground Pad	-	-	-
138	GND	-	-	Thermal Ground Pad	-	-	-
139	GND	-	-	Thermal Ground Pad	-	-	-
140	GND	-	-	Thermal Ground Pad	-	-	-
141	GND	-	-	Thermal Ground Pad	-	-	-


PIN No.	Pin Name		I/O	Description	DC Characteristics (V)		
	Normal	MUX			Min.	Typ.	Max.
142	GND	-	-	Thermal Ground Pad	-	-	-
143	GND	-	-	Thermal Ground Pad	-	-	-
144	GND	-	-	Thermal Ground Pad	-	-	-
145	GND	-	-	Thermal Ground Pad	-	-	-

 **NOTE**

- P indicates power pins; I indicates pins for digital signal input; O indicates pins for digital signal output.
- The NC (Not Connected) pins are internally connected to the module. Therefore, these pins should not be used, otherwise they may cause problems. Please contact us for more details about this information.
- The MU509 module only works on primary master mode, PCM\_CLK and PCM\_SYNC pins are in the output status.

Figure 3-1 shows the sequence of pins on the 145-pin signal interface of the MU509 module.

**Figure 3-1** Bottom view of sequence of LGA interface pins

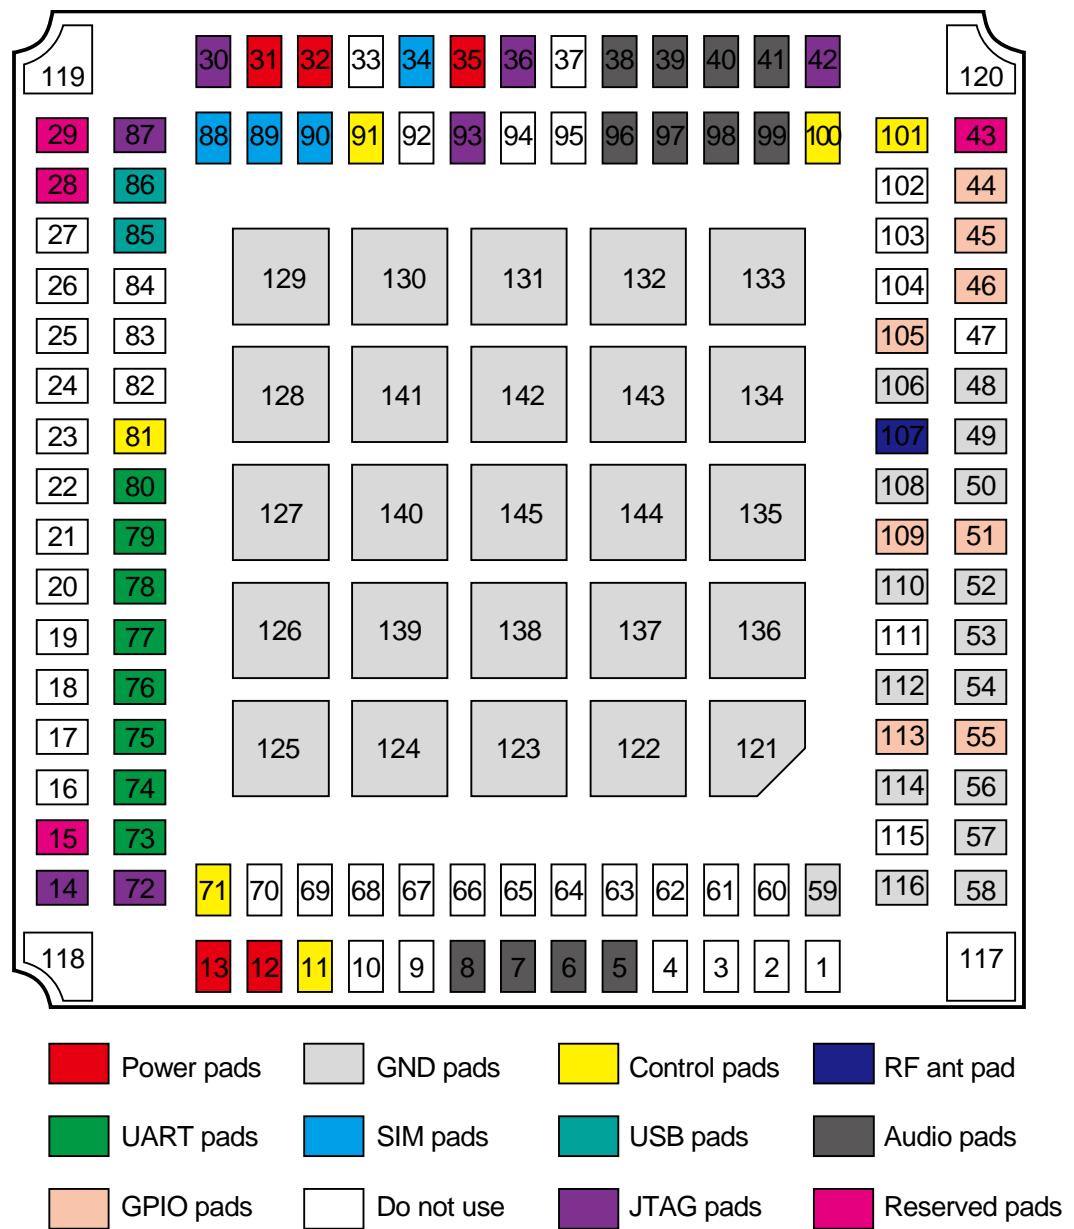

## 3.3 Power Interface

### 3.3.1 Overview

The power supply part of the MU509 module contains:

- VBAT pin for the power supply

- VCOIN pin for the standby power supply of the real-time clock (RTC)
- VCC\_EXT1 pin for external power output
- VCC\_EXT2 pin for external power output
- SIM\_VCC pin for SIM card power output

Table 3-2 lists the definitions of the pins on the power supply interface.

**Table 3-2** Definitions of the pins on the power supply interface

Pin No.	Signal Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
12, 13	VBAT	P	Pins for power voltage input	3.3	3.8	4.2
48, 49, 50, 52, 53, 54, 56, 57, 58, 59, 106, 108, 110, 112, 114, 116	GND	-	GND	-	-	-
35	VCOIN	P	Pin for standby power input of the RTC	1.5	3.0	3.25
32	VCC_EXT1	P	Pin for external power output	-	1.8	-
31	VCC_EXT2	P	Pin for external power output	-	2.6	-
34	SIM_VCC	P	Power supply for SIM card	-	1.8/2.85	-
121–145	GND	-	Thermal Ground Pad	-	-	-

### 3.3.2 VBAT Interface


When the MU509 module works normally, power is supplied through the VBAT pins and the voltage ranges from 3.3 V to 4.2 V (typical value: 3.8 V). The 145-pin LGA provides two VBAT pins and sixteen GND pins for external power input. To ensure that the MU509 module works normally, all the pins must be used efficiently.

When the MU509 module is used for different external applications, pay special attention to the design for the power supply. When the MU509 module transmits signals at the maximum power, the transient current may reach the transient peak value of about 2.75 A due to the differences in actual network environments. In this case, the VBAT voltage drops. Make sure that the voltage does not decrease below 3.3 V in any case. Otherwise, exceptions such as restart of the MU509 module may occur.

A low-dropout (LDO) regulator or switch power with current output of more than 3 A is recommended for external power supply. Furthermore, at least five 220  $\mu$ F storage capacitors are connected in parallel at the power interface of the MU509 module. In addition, to reduce the impact of channel impedance on voltage drop, you are recommended to try to shorten the power supply circuit of the VBAT interface.

It is recommended that add the EMI ferrite bead (NR3015T4R7M manufactured by TAIYO YUDEN or VLS3015T-4R7MR99 manufactured by TDK is recommended) to directly isolate DTE from DCE in the power circuit. Figure 3-2 shows the recommended power circuit of MU509 module.

**Figure 3-2** Recommended power circuit of MU509 module

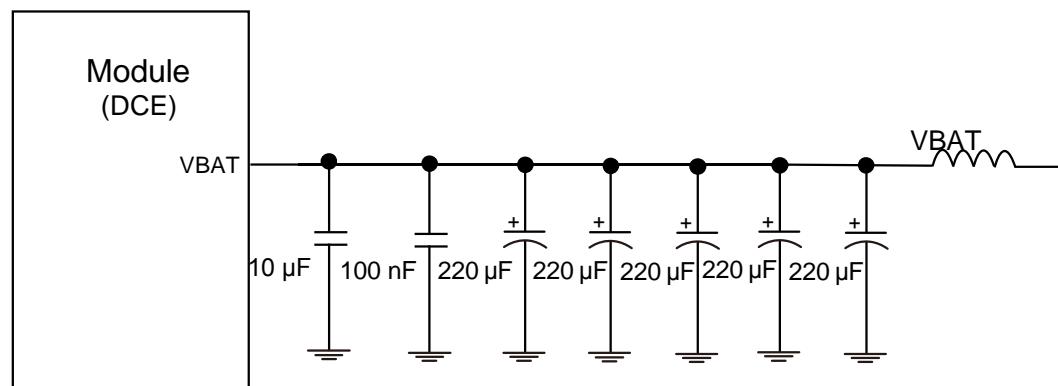

### 3.3.3 VCOIN Interface

VCOIN pin of MU509 module is used as an analog input from the 3 V coin cell for Sudden Momentary Power Loss (SMPL), Real-time Clock (RTC) and External Crystal Oscillator (XTAL) keep-alive power. A capacitor (rather than a coin cell) can be used if only SMPL is supported (not RTC or XTAL). VCOIN pin is also used as an analog output for a coin cell or a capacitor charging.

#### Sudden momentary power loss

If the monitored VBAT drops out-of-range (< 2.55 V nominal), the SMPL feature initiates a power-on sequence without software intervention, and then VBAT returns in-range within a programmable interval of between 0.5 and 2.0 seconds. SMPL achieves immediate and automatic recovery from momentary power loss. A valid voltage on VCOIN is required to run the SMPL timer. If a capacitor is used instead of a coin, it must be connected between VCOIN and the ground. The capacitor must be charged to operate properly as the SMPL power source. The capacitor value depends on the SMPL timer setting.

**Table 3-3** Keep-alive capacitor values vs. SMPL timer settings

SMPL timer setting	Capacitor value	Capacitor package (X5R)
0.5s	1.5 $\mu$ F	0805
1.0s	3.3 $\mu$ F	0805
1.5s	4.7 $\mu$ F	0805
2.0s	6.8 $\mu$ F	1206

If the SMPL counter expires without VBAT returning to its valid range, the MU509 must undergo the normal power-on sequence whenever the VBAT is detected.

## Real-time clock


If RTC is used, a manganese-lithium rechargeable battery is recommended, for example, the SII Micro Parts HB-414 and the Panasonic ML-series. Two sets of coin cell specifications are compared in Table 3-4 . When the MU509 is off, RTC and its oscillator source are still active, provided by a coin cell battery which is installed. This allows continued monitoring of RTC alarms programmed via software.

**Table 3-4** Coin cell characteristics

Parameter	Specifications	
	HB-414	ML-series
Nominal voltage	3 V	3 V
Nominal capacity	0.3 mAh	3.4 mAh
Continuous standard load	5 mA	10 mA
Operating temperature	–20°C to +60°C	–20°C to +60°C
Diameter	4.8 mm	6.8 mm
Height	1.4 mm	1.45 mm
Weight	0.07 g	0.17 g

An interrupt is generated if the coin cell voltage drops too low (and the main battery is not present). If this interrupt occurs, the RTC might be corrupted. A different interrupt is generated if the crystal oscillator stops; this signifies that handset timing is no longer accurate. Again, the RTC is corrupted.

When the VBAT power supply of the MU509 is normal, the coin cell is charged from VBAT. The MU509 reads the coin cell voltage and monitors the charging. During normal operation, the VCOIN pin voltage will stay above 2.2 V, even when the coin cell charger is turned off. Figure 3-3 shows the reference RTC circuit.

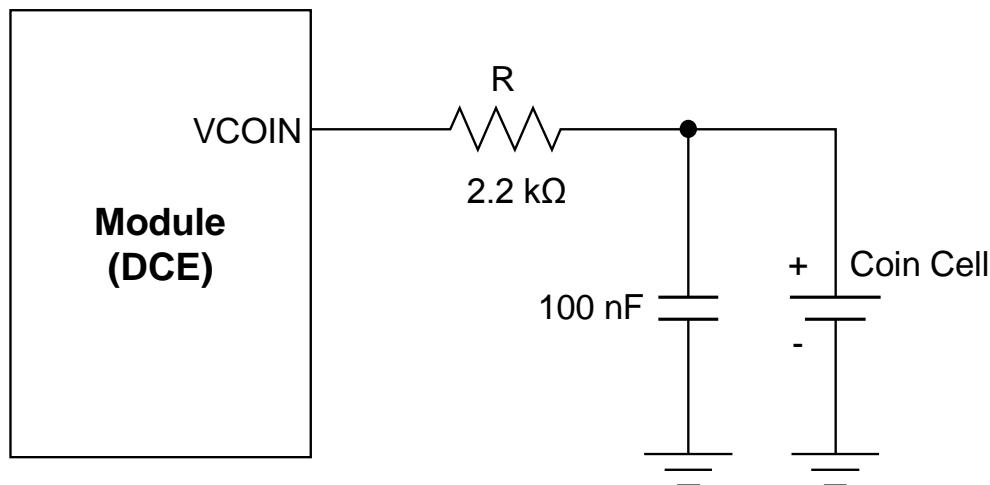**Figure 3-3** VCOIN interface circuit

### 3.3.4 Output Power Supply Interface

Output power supply interface includes VCC\_EXT1, VCC\_EXT2 and SIM\_VCC.

Through the output power supply interface, the MU509 module can supply 2.6 V and 1.8 V power externally with an output current of 20 mA (typical value) for external level conversion or other applications.

If the MU509 module is in sleep mode, the output power supply interface is in the low power consumption state (< 500  $\mu$ A). If the MU509 module is in power down mode, the output power supply is in the disabled state.

## 3.4 Signal Control Interface

### 3.4.1 Overview

The signal control part of the interface in the MU509 module consists of the following:

- Power-on/off (POWER\_ON\_OFF) pin
- Hardware reset (RESIN\_N) pin
- Network status LED (LED\_STATUS/LED\_MODE) pin
- WAKEUP\_IN Signal (WAKEUP\_IN) pin
- WAKEUP\_OUT Signal (WAKEUP\_OUT) pin

Table 3-5 lists the pins on the signal control interface.

**Table 3-5** Pins on the signal control interface

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
81	POWER_ON_OFF	I	Pin for controlling power-on and power-off	-	Pulled up on chip	-
100	RESIN_N	I	Pin for resetting the hardware	-0.3	1.8	2.1
91	LED_STATUS	I	Pin for network status LED	-	-	-
101	LED_MODE	I	Pin for network mode LED	-	-	-
11	WAKEUP_IN	I	Host to set the module into forced sleep or wake up the module from forced sleep	-0.3	2.6	2.9
71	WAKEUP_OUT	O	Module to wake up the host.	-0.3	2.6	2.9

 **NOTE**

It is recommended to use resistance of  $0 \Omega$  in the DTE to isolate signals transmitted from above pins in Table 3-5 .

### 3.4.2 Input Signal Control Pins

The MU509 module implements power-on and power-off and resets the hardware through the input signal control pins.

The power-on, power-off, and reset control parts of the interface of the MU509 module include power-on/power-off interface signal (POWER\_ON\_OFF) and the hardware reset interface signal (RESIN\_N).


The POWER\_ON\_OFF pin is used to implement power-on and power-off. If the POWER\_ON\_OFF pin is pulled down for at least 0.5s, the module is powered on; if the POWER\_ON\_OFF pin is pulled down for at least 0.5s again, the module is powered off.

The RESIN\_N pin is used to reset the hardware. When the software stops responding, the RESIN\_N pin can be pulled down for at least 10 ms to reset the hardware.

**CAUTION**

As the RESIN\_N and POWER\_ON\_OFF signals are relatively sensitive, it is recommended that you install a 10 nF capacitor near the RESIN\_N and POWER\_ON\_OFF pins of the interface for filtering. In addition, when you design a circuit on the PCB of the interface board, it is recommended that the circuit length not exceed 20 mm and that the circuit be kept at a distance of 2.54 mm (100 mil) at least from the PCB edge. Furthermore, you need to wrap the area adjacent to the signal wire with a ground wire. Otherwise, the module may be reset due to interference.

**Figure 3-4** Connections of the POWER\_ON\_OFF and RESIN\_N pins

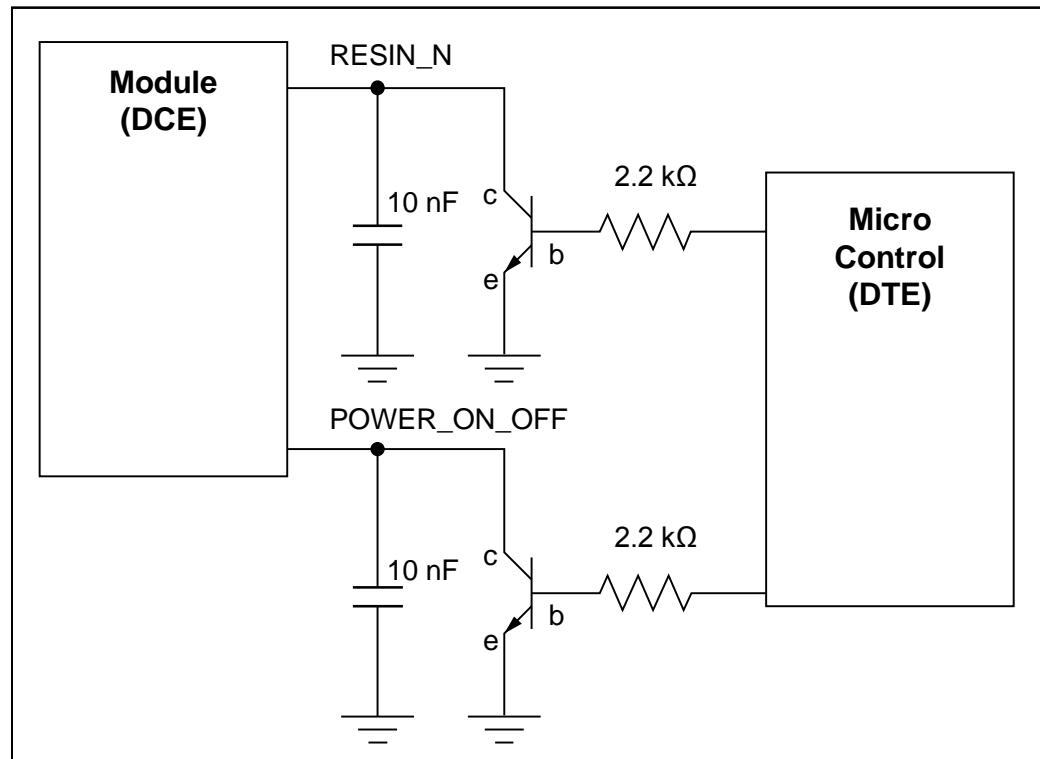


## Power-On Time Sequence

After VBAT has been applied and is stable, the module will generate an on board power on reset signal and on the release of the reset, the module will boot up.


USB\_DP will be pulled high when boot up completes, simultaneously the module starts to communicate with host via USB or UART. Figure 3-5 shows power on timing sequence.

During power on timing, please make sure the VBAT is stable.

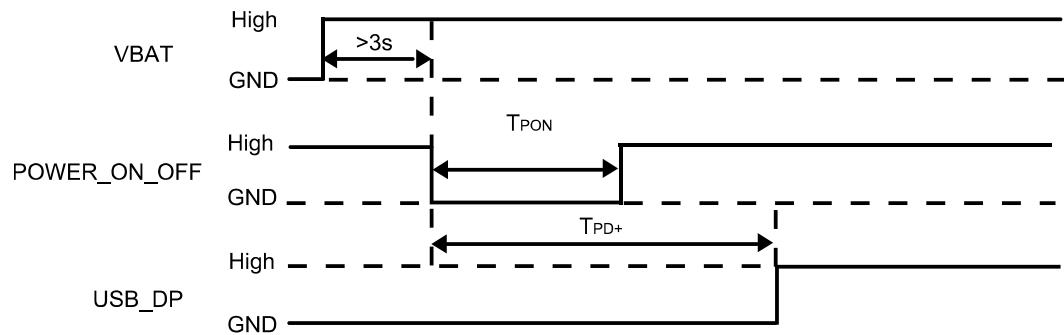**Figure 3-5** Power on timing sequence

**Table 3-6** Power on timing

Parameter	Comments	Time(Nominal values)	Units
$T_{PON}$	POWER_ON_OFF turn on time.	$0.5 < T_{PON} < 1$	s
$T_{PD+}$	POWER_ON_OFF Valid to USB D+ high	4	s

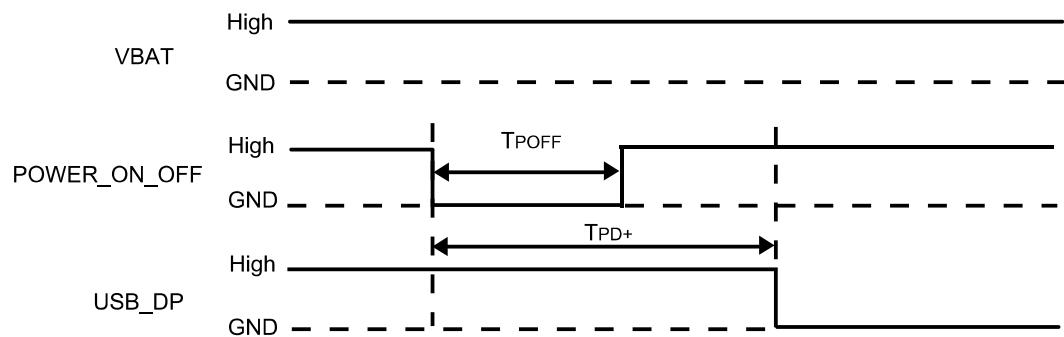If the DTE needs to detect the PID/VID of module during the BIOS phase, the detection time should exceed the  $T_{PD+}$  time.

**Figure 3-6** Power off timing

**Table 3-7** Power off timing

Parameter	Comments	Time(Nominal values)	Units
$T_{POFF}$	POWER_ON_OFF turn off time.	$0.5 < T_{POFF} < 4$	s
$T_{PD+}$	POWER_ON_OFF Valid to USB D+ high	4.6	s


 **NOTE**

For detailed information about power supply design and printed circuit board (PCB) design, see the [HUAWEI Module Power Supply Design Guide](#) and the [HUAWEI LGA Module PCB Routing Design Guide](#).

## RESIN\_N

The MU509 module supports hardware reset function. If the software of the MU509 module stops responding, you can reset the hardware through the RESIN\_N signal as shown in Figure 3-7. When a low-level pulse is supplied through the RESIN\_N pin for more than 50 ms, the hardware will be reset. After the hardware is reset, the software starts powering on the module and reports relevant information according to the actual settings. For example, the AT command automatically reports ^SYSSTART.

**Figure 3-7** Reset pulse timing

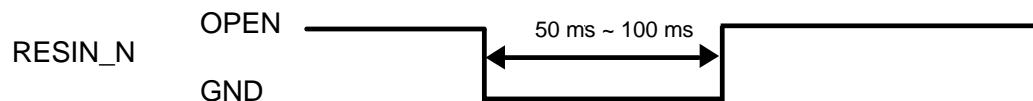 **NOTE**

The low-level pulse through the RESET pin cannot last for more than 2s. Otherwise, the MU509 module will be powered off.

### 3.4.3 Output Signal Control Pin

The MU509 module provides a network status LED pin LED\_STATUS and LED\_MODE. The pulse signal output through this pin controls the status LED on the user interface board to display the network status. The LEDs are controlled by a current sink. The high voltage is the voltage of VBAT (with the typical value of 3.8 V).

Different blinking modes of the status LED indicate different network status. Table 3-8 describes the status of the LED\_STATUS pin and LED\_MODE pin.


**Table 3-8** The status of the LED\_STATUS pin and LED\_MODE pin

No.	Operating Status	LED_STATUS	LED_MODE
1	The 3G network is successfully registered.	The indicator blinks once each time.	Light off
2	The dial-up connection is set up for accessing 3G data services.	Light on	Light off
3	The software is being downloaded or upgraded.	Light off	The indicator blinks fast.
4	The network is being searched for or no network is detected.	Light off	The indicator blinks twice each time.

No.	Operating Status	LED_STATUS	LED_MODE
5	The 2G network is successfully registered.	Light off	The indicator blinks once each time.
6	The dial-up connection is set up for accessing 2G data services.	Light off	Light on


## Blinking Once Each Time

**Figure 3-8** Status when the indicator blinks once each time

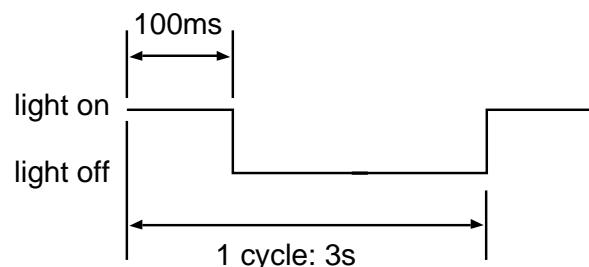


## Blinking Fast

**Figure 3-9** Status when the indicator blinks fast

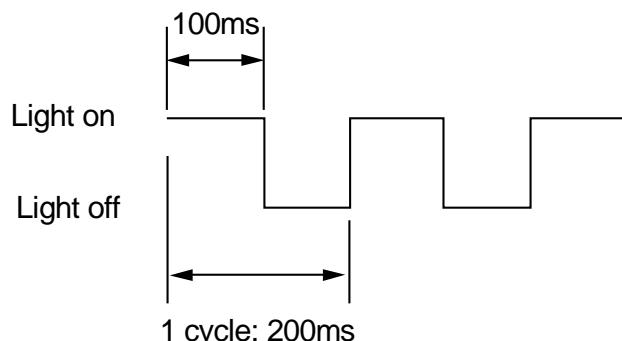

## Blinking Twice Each Time


**Figure 3-10** Status when the indicator blinks twice each time

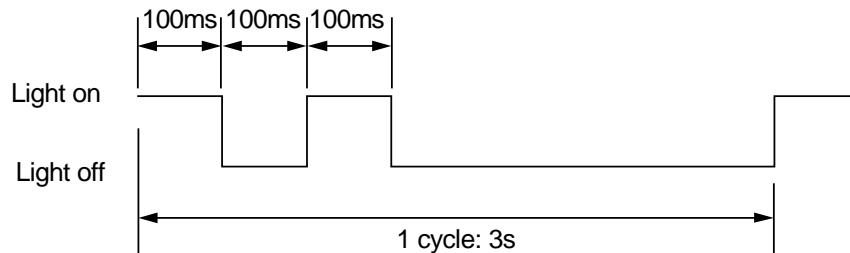

## External Circuits

Figure 3-11 shows the recommended circuits of the LED\_MODE and LED\_STATUS pins. According to LED feature, you can adjust the LED brightness by adjusting the impedance of resistor R.

**Figure 3-11** Driving circuit

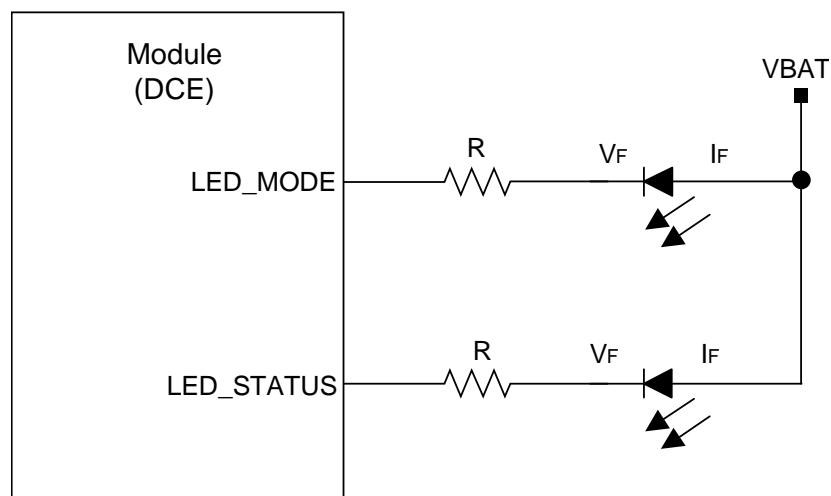

For resistance of R placed on user board, choose the value such that it satisfies the following equation:


$$I_F \cdot R + V_F = V_{BAT}$$

$V_F$ : Forward voltage

$I_F$ : Forward current

Take a LED as an example, Figure 3-12 shows its  $I_F$  -  $V_F$  curves. If  $V_{BAT}$  is 3.8 V and the desired current through the LED  $I_F$  is 3 mA, then the voltage of the LED  $V_F$  is 1.5 V according to  $I_F$  -  $V_F$  curves, and the corresponding value for resistance of R is  $(3.8-1.5)/0.003 = 767 \Omega$ .


The brightness of the LED depends on the current value, and for most of the indicator lights the current from 2 mA to 5 mA is already enough.

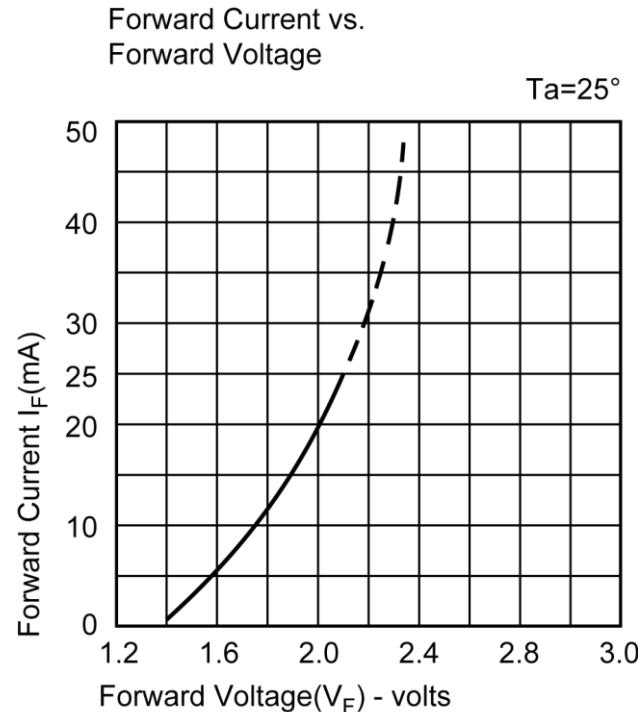**Figure 3-12** LED Typical Electro-Optical Characteristics Curves


### 3.4.4 WAKEUP\_IN Signal

The DTE controls the sleep and wakeup status of the MU509 module through the WAKEUP\_IN signal. The DTE can control the MU509 module to enter forced sleep status in following two cases:

1. If the level status of the WAKEUP\_IN signal is low when the MU509 module is powered on, the MU509 module will enter to forced sleep status.
2. If the level status of the WAKEUP\_IN signal change from high to low after the MU509 module is powered on, the MU509 module will also enter to forced sleep status.
3. If the level status of the WAKEUP\_IN signal change from low to high when the MU509 module is in forced sleep status, the MU509 module will exit from forced sleep status.

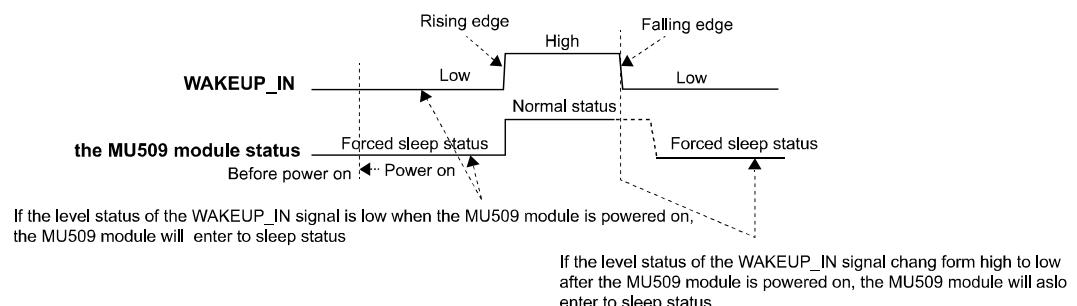**Figure 3-13** WAKEUP\_IN sequence


The level status of WAKEUP\_IN signal is high by default.


### 3.4.5 WAKEUP\_OUT Signal

The WAKEUP\_OUT signal is used to wake up the external system.


WAKEUP\_OUT signal is low by default. When a phone call or an SMS is coming, the MU509 module will output a high pulse which lasts for 1s.

Within the duration of the high pulse, if a new phone call or an SMS is coming, the MU509 module will output the high pulse over again.

**Figure 3-14** WAKEUP\_OUT sequence

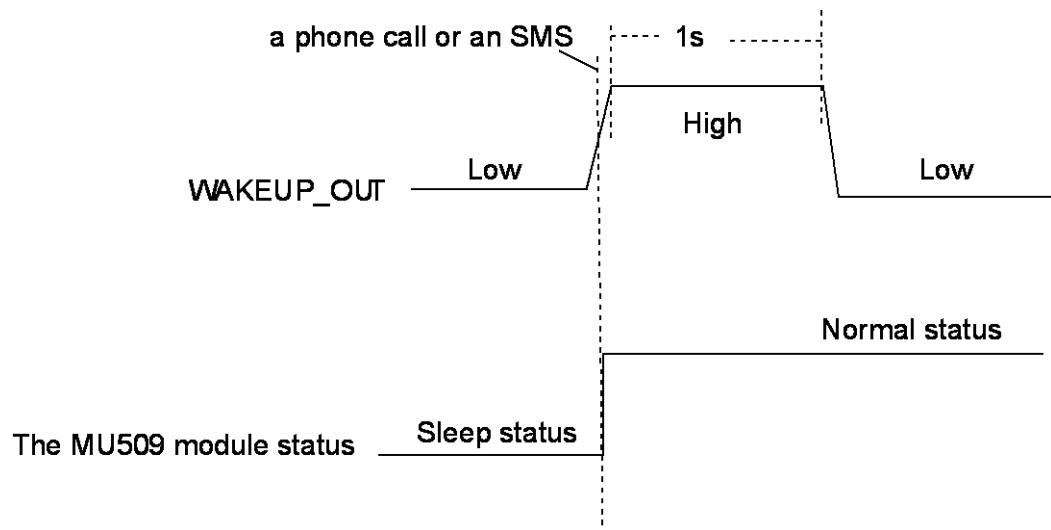

**Figure 3-15** Connections of the WAKEUP\_IN and WAKEUP\_OUT pins

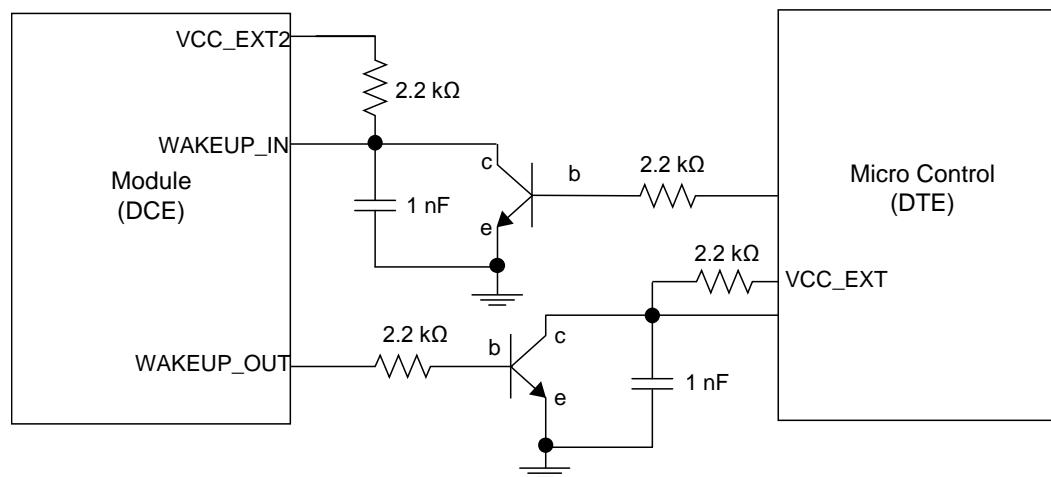

## 3.5 UART Interface

### 3.5.1 Overview

The MU509 module provides the RS-232 UART (8-wire UART) interface for one asynchronous communication channel. As the UART interface supports signal control through standard modem handshake, AT commands are entered and serial communication is performed through the UART interface. The UART has the following features:

- Full-duplex
- 7-bit or 8-bit data
- 1-bit or 2-bit stop bit
- Odd parity check, even parity check, or non-check
- Baud rate clock generated by the system clock
- Direct memory access (DMA) transmission
- Baud rate ranging from 600 bit/s to 230400 bit/s (115200 bit/s by default)
- Self-adapted baud rate ranging from 1200 bit/s to 115200 bit/s

Table 3-9 lists the UART interface signals.


**Table 3-9** UART interface signals

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
76	UART_TX	O	Data sending on the wireless module	-0.3	2.6	2.9
78	UART_RX	I	Data receive end of the module	-0.3	2.6	2.9
77	UART_RING	O	Ringing indication on the wireless module	-0.3	2.6	2.9
74	UART_RTS	O	Data sending request on the wireless module	-0.3	2.6	2.9
79	UART_DTR	I	Data terminal ready on the wireless module	-0.3	2.6	2.9
80	UART_CTS	I	Clearing to send on the wireless module	-0.3	2.6	2.9
75	UART_DCD	O	Data carrier detection on the wireless module	-0.3	2.6	2.9
73	UART_DSR	O	Data ready on the wireless module	-0.3	2.6	2.9

### 3.5.2 Circuit Recommended for the UART Interface

Figure 3-16 shows the connection of the UART interface in the MU509 module (DCE) with the host (DTE).

**Figure 3-16** Connection of the UART interface in the MU509 module (DCE) with the host (DTE)

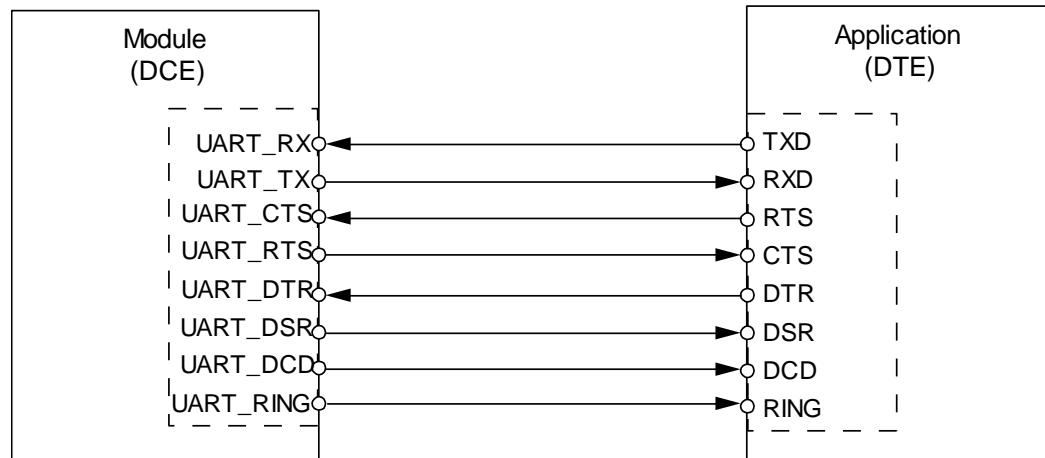

The RS-232 chip can be used to connect the MU509 module to the RS-232-C interface. In this connection, the transistor-transistor logic (TTL) level and the Electronic Industries Association (EIA) level are converted mutually. For example, it is recommended that you use the MAX3232 chip with a 2-wire serial port and the SP3238 or MAX3238 chip with an 8-wire serial port.



#### NOTE

- For detailed application of the MU509 UART interface, see the [HUAWEI Module UART Serial Port Design Guide](#).
- It is recommended that set the pins related to UART interface as test points on the DTE board for debug.
- The maximum level of UART interface signals is 2.9 V. If these signals are connected to a host with 3.3 V level, a level conversion circuit is required.
- Make sure that the level of the UART signals are 0 V before MU509 module is powered on to avoid the wind blow in which may cause the module cannot work properly.

## 3.6 USB Interface

The MU509 is compliant with USB 2.0 full speed protocol. The USB interface is powered directly from the 3.3 V supply. The USB input/output lines are compatible with the USB 2.0 3.3 V signal specifications. Figure 3-17 shows the circuit of the USB interface.


**Table 3-10** Definition of the USB interface

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
86	USB_DP	I/O	USB data signal D+	-	-	-
85	USB_DM	I/O	USB data signal D-	-	-	-

According to USB protocol, for bus timing or electrical characteristics of MU509 USB signal, please refer to the chapter 7.3.2 of [Universal Serial Bus Specification 2.0](#).

**Figure 3-17** Recommended circuit of USB interface

J2

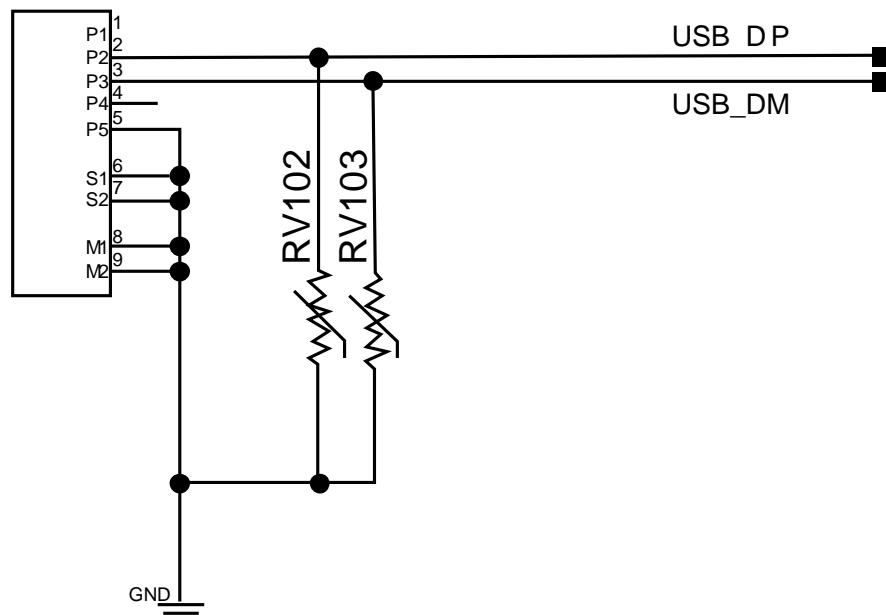
**NOTE**

- Since the USB interface of MU509 module supports USB 2.0 full speed, the resistance "RV102 and RV103" in the Figure 3-17 must be Voltage Sensitive Resistor with small capacitance (ALVC18S02003 manufactured by AMOTECH or B72590T7900V60 manufactured by EPCOS is recommended.). In addition, The layout design of this circuit on the DTE board should comply with the USB 2.0 full speed protocol, with differential lining and impedance control to  $90 \Omega$
- It is recommended that set USB\_DM and USB\_DP pins as test points and then place these test points on the DTE for debug.

## 3.7 SIM Card Interface

### 3.7.1 Overview



The MU509 module provides a SIM card interface complying with the ISO 7816-3 standard and supports automatic detection of a 3.0 V SIM card or a 1.8 V SIM card. Table 3-11 lists the SIM card interface signals.

**Table 3-11** SIM card interface signals

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
34	SIM_VCC	P	Power source for the external UIM/SIM.	-	1.8/2.85	-
89	SIM_DATA	I/O	External UIM/SIM data signal.	-0.3	1.8/2.85	2.1/3.15
90	SIM_CLK	O	External UIM/SIM clock signal.	-0.3	1.8/2.85	2.1/3.15
88	SIM_RESET	O	External UIM/SIM reset signal.	-0.3	1.8/2.85	2.1/3.15

### 3.7.2 Circuit Recommended for the SIM Card Interface

As the MU509 module is not equipped with a SIM card socket, you need to place a SIM card socket on the user interface board. The SIM card signals are transmitted outwards through the 145-pin LGA interface. Figure 3-18 shows the circuit of the SIM card interface.

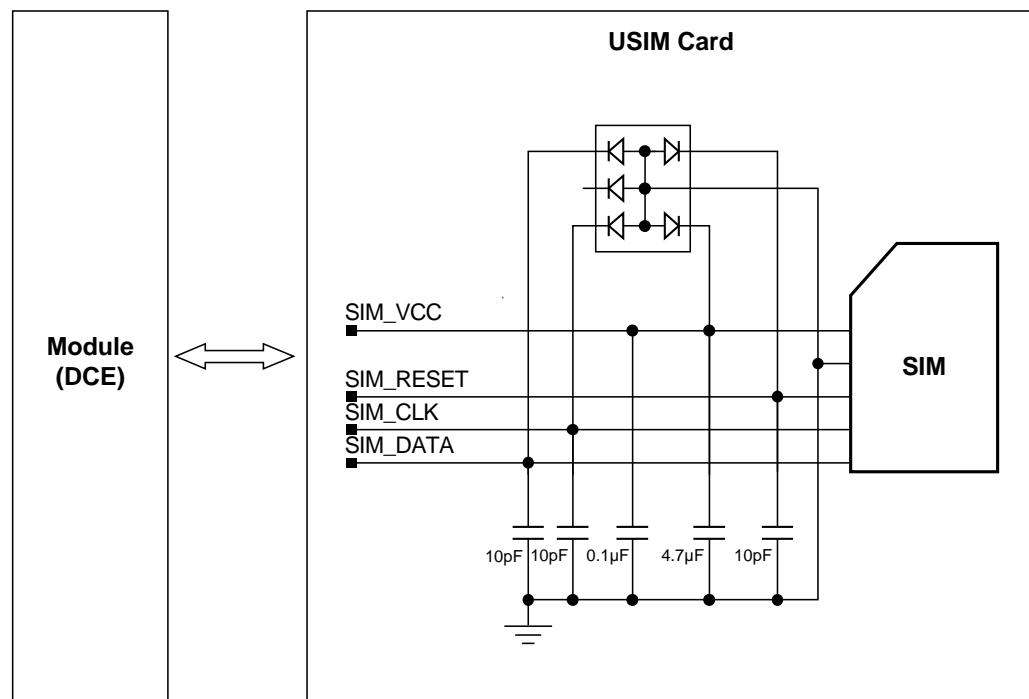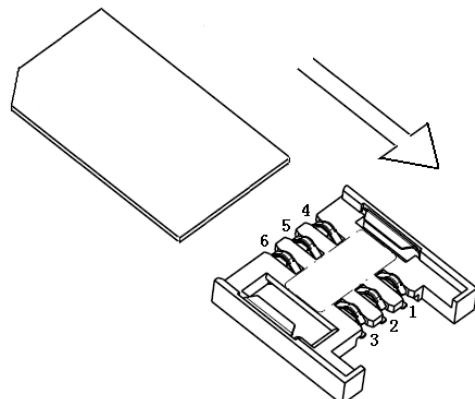**Figure 3-18** Circuit of the SIM card interface**Figure 3-19** Pin definition of SIM Socket

- pin1: SIM\_VCC
- pin2: SIM\_RESET
- pin3: SIM\_CLK
- pin4: GND
- pin5: NULL
- pin6: SIM\_DATA


**CAUTION**

- To meet the requirements of 3GPP TS 51.010-1 protocols and electromagnetic compatibility (EMC) authentication, the SIM card socket should be placed near the LGA interface (it is recommended that the PCB circuit connecting the LGA interface and the SIM card socket not exceed 100 mm), because a long circuit may lead to wave distortion, thus affecting signal quality.
- It is recommended that you wrap the area adjacent to the SIM\_CLK and SIM\_DATA signal wires with a ground wire. The GND pin of the SIM card socket and the GND pin of the SIM card must be well connected to the power GND pin supplying power to the MU509 module.
- A 0.1  $\mu$ F or a 0.22  $\mu$ F capacitor and a 4.7  $\mu$ F capacitor are placed between the SIM\_VCC and GND pins in a parallel manner. Three 10 pF capacitors are placed between the SIM\_DATA and GND pins, the SIM\_RST and GND pins, and the SIM\_CLK and GND pins in parallel to filter interference from RF signals.
- You do not need to pull the SIM\_DATA pin up during design as a 20000- $\Omega$  resistor is used to connect the SIM\_DATA pin to the VSIM pin.

### 3.7.3 ESD Protection for the SIM Card Interface

It is recommended that you take electrostatic discharge (ESD) protection measures near the SIM card socket. Figure 3-20 shows ESD protection circuit of the SIM card, in which the transient voltage suppressor (TVS) diode is placed as close as possible to the SIM card socket, and the GND pin of the ESD protection component is well connected to the power GND pin that supplies power to the MU509 module.

**Figure 3-20** ESD protection circuit on the SIM card

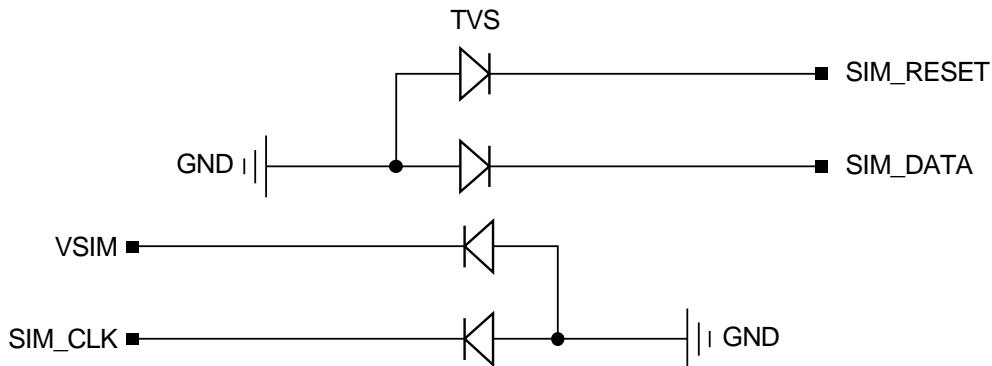

## 3.8 Audio Interface

### 3.8.1 Analogue Audio


The MU509 provides two audio I/O channels (Data only doesn't support the voice function).


The two audio I/O channels are completely different and thus have good performance of resisting RF interferences. The routes on the printed circuit board (PCB) should be placed in parallel with each other and should be short. The filter circuit on the two sides should be symmetric. The differential signals should be close to each other. The audio output signals in differential pairs and the audio input signals in differential pairs should be separated effectively through ground. In addition, the audio signals should be located away from the circuits of the power supply, RF, and antenna.

The first audio channel can be used for the handset without requiring any audio amplifier. The output power for the differential ear output is typically 350 mW for a full-scale +3 dBm sine wave into a  $32\ \Omega$  speaker.

The second audio channel can be used for the hands-free without requiring any audio amplifier. The output pins are configured differently, with a rated output of 500 mW into an  $8\ \Omega$  speaker. Considerable current flows between the audio output pins and the speaker, and thus wide PCB traces are recommended (20 mils).

**Figure 3-21** Circuit diagram of the interface of the first audio channel

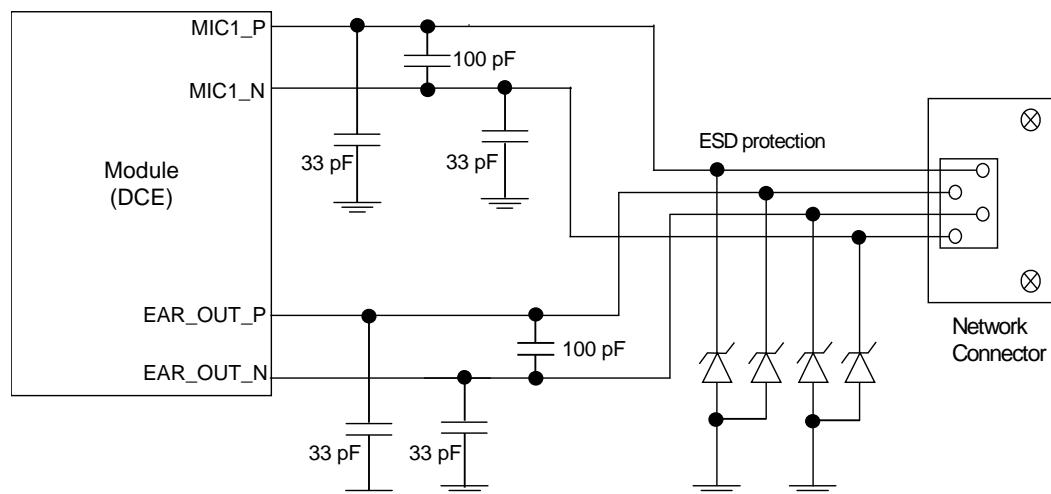

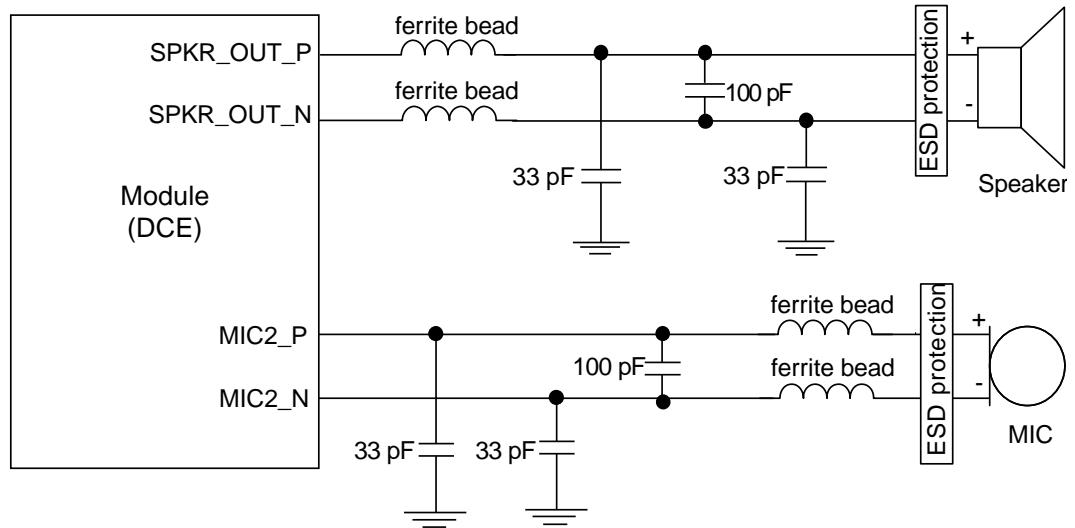**Figure 3-22** Circuit diagram of the interface of the second audio channel

**NOTE**

- It is recommended that a TVS be used on the related interface, to prevent electrostatic discharge and protect integrated circuit (IC) components.
- Data only does not support the voice function.

### 3.8.2 Digital Audio


The MU509 provides one digital audio channels (Data only doesn't support the voice function). Table 3-12 lists the signals on the digital audio interface.

**Table 3-12** Signals on the digital audio interface

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
5	PCM_SYNC	O	PCM interface sync	-0.3	2.6	2.9
6	PCM_DIN	I	PCM I/F data in	-0.3	2.6	2.9
7	PCM_DOUT	O	PCM I/F data out	-0.3	2.6	2.9
8	PCM_CLK	O	PCM interface clock	-0.3	2.6	2.9

The MU509 PCM interface enables communication with an external codec to support linear and  $\mu$ -law format. The PCM\_SYNC runs at 8 kHz with a 50% duty cycle.

Figure 3-23 Circuit diagram of the interface of the PCM(MU509 is used as PCM master)

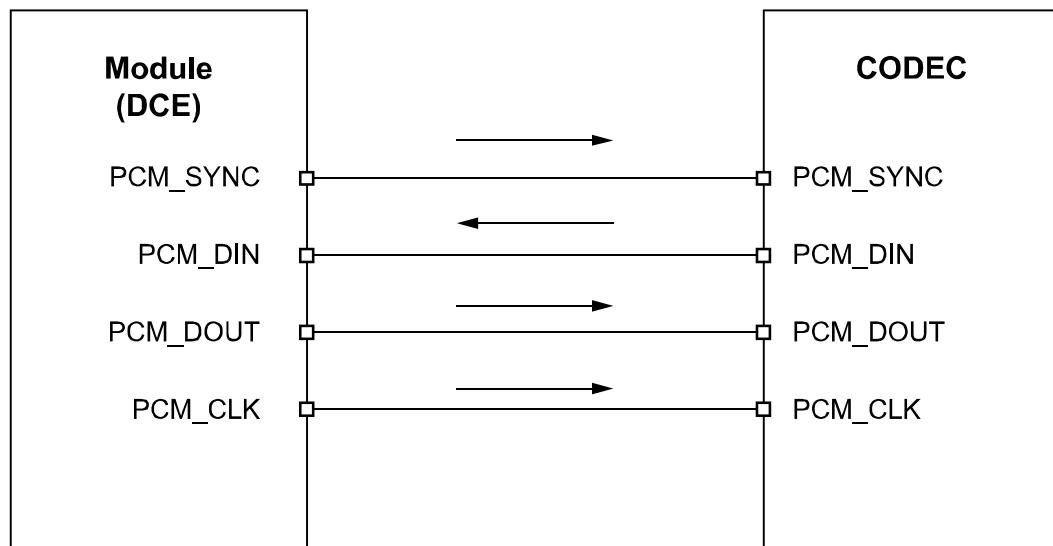

 **NOTE**

- PCM\_SYNC: Output when PCM master;
- PCM\_CLK: Output when PCM master;
- It is recommended that a TVS be used on the related interface, to prevent electrostatic discharge and protect integrated circuit (IC) components.
- Data only edition does not support the voice function.

### 3.8.3 Primary Mode

On Primary mode MU509 provides a 16-bit linear or  $\mu$ -law, with short-sync and 2.048 MHz clock (on the PCM\_CLOCK pin).

## 3.9 General Purpose I/O Interface

The LGA module provides 8 channels GPIO pins for customers to use controlling signals which are worked at 2.6 V CMOS logic levels. Customers can use AT command to control the state of logic levels of eight channels GPIO output signal. For MU509-b, MU509-g and HUAWEI MU509-1, see the [HUAWEI MU509 HSDPA LGA Module AT Command Interface Specification](#). For MU509-c, see the [HUAWEI MU509-c HSDPA LGA Module AT Command Interface Specification](#).

**Table 3-13** Signals on the GPIO interface

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
44, 45, 46, 51, 55, 105, 109, 113	GPIO	I/O	General I/O pins	-0.3	2.6	2.9

## 3.10 JTAG Interface

The MU509 module provides one JTAG interface (Joint Test Action Group). It is suggested that place the follow test points in the DTE board for debug. It is recommended that set the 9 pins related to JTAG interface as test points on the DTE for tracing and debug.

**Table 3-14** Signals on the JTAG interface

Pin No.	Pin Name	I/O	Description	DC Characteristics (V)		
				Min.	Typ.	Max.
30	JTAG_TMS	I	JTAG Test mode select	-0.3	1.8	2.1
36	JTAG_TRST_N	I	JTAG reset.	-0.3	1.8	2.1
42	JTAG_TCK	I	JTAG clock input	-0.3	1.8	2.1
72	JTAG_TDO	O	JTAG test data output	-0.3	1.8	2.1
87	JTAG_TDI	I	JTAG test data input	-0.3	1.8	2.1
93	JTAG_RTCK	O	JTAG return clock	-0.3	1.8	2.1
14	PS_HOLD	I	This input high to keep power on, low to shut down.	-	1.8	-
32	VCC_EXT1	P	1.8 V POWER output	-	1.8	2.1
100	RESIN_N	I	Reset module.	-0.3	1.8	2.1

## 3.11 RF Antenna Interface

The MU509 module provides an RF antenna interface for connecting an external antenna. Through the MAIN\_ANT pad, the antenna interface is routed to the coaxial connector on the DTE (for impedance  $50\ \Omega$ ). The external antenna is connected to the module through the coaxial connector.

A matching location for the antenna must be reserved at the antenna port.

**Table 3-15** Signals on RF Antenna interface

Pin No.	Pin Name	I/O	Description
107	MAIN_ANT	-	RF main antenna interface



## 3.12 NC Pins

The LGA module have 47 NC pins, All of NC interface should not be connected. Please keep these pins open.

**Table 3-16** Signals on NC interface

Pin No.	Pin Name	I/O	Description
1–4, 9, 10, 16–27, 33, 37, 47, 60–70, 82–84, 92, 94, 95, 102–104, 111, 115, 117–120	NC	-	Not connected, please keep this pin open.



# 4 RF Specifications

## 4.1 About This Chapter

This chapter describes the RF specifications of the MU509 module, including:

- Antenna Installation Guidelines
- Operating Frequencies
- Conducted RF Measurement
- Conducted Rx Sensitivity and Tx Power
- Antenna Design Requirements

## 4.2 Antenna Installation Guidelines

- Install the antenna in a place covered by the signal.
- The Antenna must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.
- Antenna must not be installed inside metal cases.
- Antenna must be installed also according Antenna manufacturer instructions.

## 4.3 Operating Frequencies

Table 4-1 shows the RF bands supported by MU509.

**Table 4-1** RF bands

Operating Band	Tx	Rx
UMTS 2100 (Band I)	1920 MHz–1980 MHz	2110 MHz–2170 MHz
UMTS 1900 (Band II)	1850 MHz–1910 MHz	1930 MHz–1990 MHz
UMTS 900 (Band VIII)	880 MHz–915 MHz	925 MHz–960 MHz
UMTS 850 (Band V)	824 MHz–849 MHz	869 MHz–894 MHz

Operating Band	Tx	Rx
GSM 850	824 MHz–849 MHz	869 MHz–894 MHz
GSM 900	880 MHz–915 MHz	925 MHz–960 MHz
GSM 1800 (DCS)	1710 MHz–1785 MHz	1805 MHz–1880 MHz
GSM 1900 (PCS)	1850 MHz–1910 MHz	1930 MHz–1990 MHz

## 4.4 Conducted RF Measurement

### 4.4.1 Test Environment

<b>Test instrument</b>	R&S CMU200
<b>Power supply</b>	KEITHLEY 2306
<b>RF cable for testing</b>	L08-C014-350 of DRAKA COMTEQ or Rosenberger Cable length: 29 cm Compensation for WCDMA 850 MHz or WCDMA 900 MHz: 0.6 dB Compensation for WCDMA 2100 MHz or WCDMA 1900 MHz: 0.8 dB



#### NOTE

- The compensation for different frequency bands relates to the cable and the test environment.
- The instrument compensation needs to be set according to the actual cable conditions.

### 4.4.2 Test Standards

Huawei modules meet all 3GPP test standards relating to both 2G and 3G. Each module passes strict tests at the factory and thus the quality of the modules is guaranteed.

## 4.5 Conducted Rx Sensitivity and Tx Power

### 4.5.1 Conducted Receive Sensitivity

The conducted receive sensitivity is a key parameter that indicates the receiver performance of MU509. The conducted receive sensitivity refers to the weakest signal that the module at the antenna port can receive. The BER must meet the 3GPP protocol requirements in the case of the minimum signal.

The **3GPP Protocol Claim** column in Table 4-2 lists the required minimum values, and the **Test Value** column lists the tested values of MU509.

**Table 4-2** MU509 conducted Rx sensitivity (Unit: dBm)

Item	3GPP Protocol Claim (dBm)	MU509 Test Value (dBm)		
		Min.	Typ.	Max
GSM850	GMSK (BER<2.43%)	< -102	-	-109
	8PSK (MCS5, BLER<10%)	< -98	-	-103
GSM900	GMSK (BER<2.43%)	< -102	-	-109
	8PSK (MCS5, BLER<10%)	< -98	-	-103
GSM1800	GMSK (BER<2.43%)	< -102	-	-109
	8PSK (MCS5, BLER<10%)	< -98	-	-103
GSM1900	GMSK (BER<2.43%)	< -102	-	-109
	8PSK (MCS5, BLER<10%)	< -98	-	-103
BandI (BER<0.1%)		< -106.7	-	-110
BandII (BER<0.1%)		< -104.7	-	-108.5
Band VIII (BER<0.1%)		< -103.7	-	-110
Band V (BER<0.1%)		< -104.7	-	-110
				-107



#### NOTE

The test values are the average of some test samples.

### 4.5.2 Conducted Transmit Power

The conducted transmit power is another indicator that measures the performance of MU509. The conducted transmit power refers to the maximum power that the module tested at the antenna port can transmit. According to the 3GPP protocol, the required transmit power varies with the power class.

Table 4-3 lists the required ranges of the conducted transmit power of MU509. The tested values listed in the Test Value column must range from the minimum power to the maximum power.

**Table 4-3** MU509 conducted Tx power (unit: dBm)

Item	3GPP Protocol Claim (dBm)	MU509 Test Value (dBm)		
		Min.	Typ.	Max.
GSM850	GMSK(1Tx Slot)	31–35	31	32.5
	8PSK(1Tx Slot)	24–30	25.5	27
GSM900	GMSK(1Tx Slot)	31–35	31	32.5
	8PSK(1Tx Slot)	24–30	25.5	27
GSM1800	GMSK(1Tx Slot)	28–32	28	29.5
	8PSK(1Tx Slot)	23–29	24.5	26
GSM1900	GMSK(1Tx Slot)	28–32	28	29.5
	8PSK(1Tx Slot)	23–29	24.5	26
Band I(W2100)		21–25	21.5	23
Band II(W1900)		21–25	21.5	23
Band VIII(W900)		21–25	21.5	23
Band V(W850)		21–25	21.5	23
				24.5

## 4.6 Antenna Design Requirements

### 4.6.1 Antenna Design Indicators

#### Antenna Efficiency

Antenna efficiency is the ratio of the input power to the radiated or received power of an antenna. The radiated power of an antenna is always lower than the input power due to the following antenna losses: return loss, material loss, and coupling loss. The efficiency of an antenna relates to its electrical dimensions. To be specific, the antenna efficiency increases with the electrical dimensions. In addition, the transmission cable from the antenna port of MU509 to the antenna is also part of the antenna. The cable loss increases with the cable length and the frequency. It is recommended that the cable loss be as low as possible, for example, U.FL-LP-088 made by HRS.

The following antenna efficiency (free space) is recommended for MU509 to ensure high radio performance of the module: **Efficiency of the master antenna > 50% (-4 dB)**, In addition, the efficiency should be tested with the transmission cable.

#### S11 or VSWR

S11 (return loss) indicates the degree to which the input impedance of an antenna matches the reference impedance ( $50\ \Omega$ ). S11 shows the resonance feature and

impedance bandwidth of an antenna. Voltage standing wave ratio (VSWR) is another expression of S11. S11 relates to the antenna efficiency. S11 can be measured with a vector analyzer.

The following S11 values are recommended for the antenna of MU509: **S11 of the master antenna < -6 dB**

## Polarization

The polarization of an antenna is the orientation of the electric field vector that rotates with time in the direction of maximum radiation.

The linear polarization is recommended for the antenna of MU509.

## Radiation Pattern

The radiation pattern of an antenna reflects the radiation features of the antenna in the remote field region. The radiation pattern of an antenna commonly describes the power or field strength of the radiated electromagnetic waves in various directions from the antenna. The power or field strength varies with the angular coordinates ( $\theta$  and  $\phi$ ), but is independent of the radial coordinates.

The radiation pattern of half wave dipole antennas is omnidirectional in the horizontal plane, and the incident waves of base stations are often in the horizontal plane. For this reason, the receiving performance is optimal.

The following radiation patterns are recommended for the antenna of MU509. **Master antenna: omnidirectional**

## Gain and Directivity

The radiation pattern of an antenna represents the field strength of the radiated electromagnetic waves in all directions, but not the power density that the antenna radiates in the specific direction. The directivity of an antenna, however, measures the power density that the antenna radiates.

Gain, as another important parameter of antennas, correlates closely to the directivity. The gain of an antenna takes both the directivity and the efficiency of the antenna into account. The appropriate antenna gain prolongs the service life of relevant batteries.

The following antenna gain is recommended for MU509. **Gain of the master antenna  $\leq 2.5$  dBi**

### NOTE

- The antenna consists of the antenna body and the relevant RF transmission cable. Take the RF transmission cable into account when measuring any of the preceding antenna indicators.
- Huawei cooperates with various famous antenna suppliers who are able to make suggestions on antenna design, for example, Amphenol, Skycross, Pulse, etc.

## 4.6.2 Interference

Besides the antenna performance, the interference on the user board also affects the radio performance (especially the TIS) of the module. To guarantee high performance of the module, the interference sources on the user board must be properly controlled.

On the user board, there are various interference sources, such as the LCD, CPU, audio circuits, and power supply. All the interference sources emit interference signals that affect the normal operation of the module. For example, the module sensitivity can be decreased due to interference signals. Therefore, during the design, you need to consider how to reduce the effects of interference sources on the module. You can take the following measures: Use an LCD with optimized performance; shield the LCD interference signals; shield the signal cable of the board; or design filter circuits.

Huawei is able to make technical suggestions on radio performance improvement of the module.

## 4.6.3 GSM/WCDMA Antenna Requirements

The antenna for MU509 must fulfill the following requirements:

GSM/WCDMA Antenna Requirements	
Frequency range	Depending on frequency band(s) provided by the network operator, the customer must use the most suitable antenna for that/those band(s)
Bandwidth	70 MHz in GSM850 80 MHz in GSM900 170 MHz in DCS 140 MHz PCS 70 MHZ in WCDMA850 80 MHz in WCDMA900 140 MHz in WCDMA1900 250 MHz in WCDMA2100 band
Gain	Gain < 3 dBi
Impedance	50 Ω
Input power	> 33 dBm(2 W) peak power in GSM > 24 dBm Average power in WCDMA
VSWR absolute max	≤ 10:1
VSWR recommended	≤ 2:1

Furthermore if the device is developed for the US and/or Canada market, it must comply with the FCC and/or IC requirements:

This device is to be used only for mobile and fixed application. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other

antenna or transmitter. End-users must be provided with transmitter operation conditions for satisfying RF exposure compliance. OEM integrators must ensure that the end user has no manual instructions to remove or install the UC864-E/G/WD /WDU module. Antennas used for this OEM module must not exceed 3dBi gain for mobile and fixed operating configurations.

## 4.6.4 Radio Test Environment

The antenna efficiency, antenna gain, radiation pattern, total radiated power (TRP), and TIS can be tested in a microwave testing chamber.

Huawei has a complete set of OTA test environments (SATIMO microwave testing chambers and ETS microwave testing chambers). The testing chambers are certified by professional organizations and are applicable to testing at frequencies ranging from 380 MHz to 6GHz. The test items are described as follows:

### Passive Tests


- Antenna efficiency
- Gain
- Pattern shape
- Envelope correlation coefficient

### Active Tests

- **TRP:** GSM, WCDMA, CDMA, TD-SCDMA, and LTE systems
- **TIS:** GSM, WCDMA, CDMA, TD-SCDMA, and LTE systems

Figure 4-1 shows the SATIMO microwave testing chamber.

**Figure 4-1** SATIMO microwave testing chamber

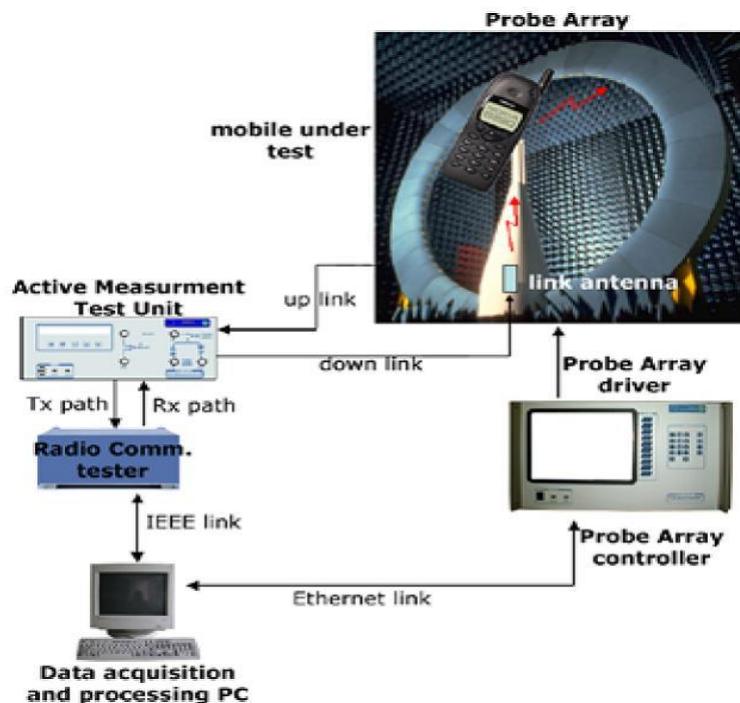

# 5 Electrical and Reliability Features

## 5.1 About This Chapter

This chapter describes the electrical and reliability features of the interfaces in the MU509 module, including:

- Extreme Operating Conditions
- Operating and Storage Temperatures and Humidity
- Electrical Features of Application Interfaces
- Power Supply Features
- Reliability Features
- EMC and ESD Features

## 5.2 Extreme Operating Conditions



### WARNING

Table 5-1 lists the extreme operating conditions for the MU509 module. Using the MU509 module beyond these conditions may result in permanent damage to the module.

**Table 5-1** Extreme working conditions for the MU509 module

Symbol	Specification	Minimum Value	Maximum Value	Unit
VBAT	External power voltage	-0.4	5.0	V
VCOIN	Input voltage of standby power for the RTC	2.0	3.15	V
V <sub>I</sub>	Data pin voltage	-0.4	3.3	V

## 5.3 Operating and Storage Temperatures and Humidity

Table 5-2 lists the operating and storage temperatures and humidity for the MU509 module.

**Table 5-2** operating and storage temperatures and humidity for the MU509 module

Specification	Minimum Value	Maximum Value	Unit
Normal working temperatures <sup>[1]</sup>	-20	+70	°C
Extreme working temperatures <sup>[2]</sup>	-30 to -20	+70 to +75	°C
Ambient temperature for storage	-40	+85	°C
Moisture	5	95	%

 **NOTE**

[1]: When the MU509 module works at this temperature, all its RF indexes comply with the 3GPP TS 45.005 specifications.

[2]: When the MU509 module works at this temperature, certain RF indexes do not comply with the 3GPP TS 45.005 specifications.

## 5.4 Electrical Features of Application Interfaces

Table 5-3 lists electrical features (typical values).

**Table 5-3** Electrical features of application interfaces

Parameter	Description	Minimum Value	Maximum Value	Unit
$V_{IH}$	High-level input voltage	$0.65 \times VDD\_PX$	$VDD\_PX + 0.3$	V
$V_{IL}$	Low-level input voltage	-0.3	$0.35 \times VDD\_PX$	V
$I_{leak}$	Input leakage current	-0.2	0.2	$\mu A$
$V_{OH}$	High-level output voltage	$VDD\_PX - 0.45$	$VDD\_PX$	V
$V_{OL}$	Low-level output voltage	0	0.45	V
$I_{OH}$	High-level output current	1.5	-	mA

Parameter	Description	Minimum Value	Maximum Value	Unit
$I_{OL}$	Low-level output current	-	-1.5	mA



**NOTE**  
 VDD\_PX is 2.6 V or 1.8 V. To get the details about the voltage of VDD\_PX, please refer to Table 3-1 .

## 5.5 Power Supply Features


### 5.5.1 Input Power Supply

Table 5-4 lists the requirements for input power of the MU509 module.

**Table 5-4** Requirements for input power of the MU509 module

Parameter	Minimum Value	Typical Value	Maximum Value	Ripple	Unit
VBAT	3.3	3.8	4.2	< 50 mVpp (0 Hz to 2.5 GHz)	V
VCOIN	1.5	3.0	3.25	< 30 mVpp	V

**Figure 5-1** Power Supply During Burst Emission

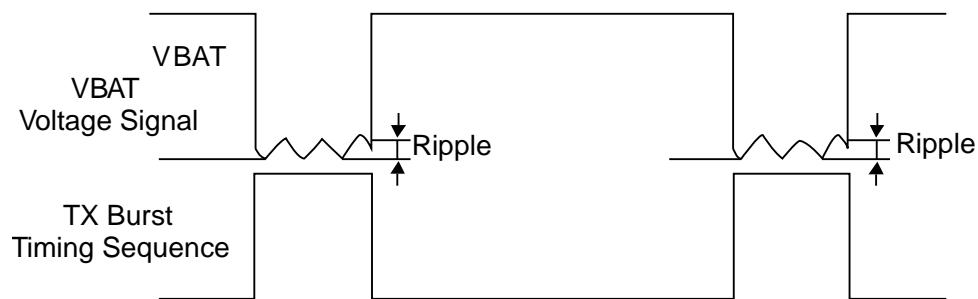

**NOTE**  
 The VBAT Minimum Value must be guaranteed during the burst (with 2.75 A Peak in GSM, GPRS or EGPRS mode).

**Table 5-5** Requirements for input current of the MU509 module

Power	Peak (Maximum)	Normal (Maximum)
3.8 V	2750 mA	1100 mA

## 5.5.2 Power Consumption

The power consumptions of MU509 in different scenarios are respectively listed in Table 5-6 ,Table 5-7 , Table 5-8 , Table 5-9 , Table 5-10 , Table 5-11 and Table 5-12 .

The power consumption listed in this section is tested when the power supply of MU509 module is 3.8 V. Typical values are measured at room temperature, and minimum and maximum values are measured over the entire operating temperature range.

**Table 5-6** DC power consumption (power off mode and Standby mode)

Description	Bands	Test Value	Units	Notes/Configuration
Power off mode	/	8	µA	Module supplied but power off
Standby mode	UMTS bands	2	mA	DRX cycle = 8 (2.56s)
	GSM bands	3	mA	MFRMS = 5 (1.175s)

 **NOTE**

- Standby current consumption with Sleep mode activated-Suspend (assumes USB bus is fully suspended during measurements).
- The above values are the average of some test samples.

**Table 5-7** DC power consumption (idle mode)

Description	Bands	Test Value	Units	Notes/Configuration
HSDPA/WCDMA	UMTS bands	66	mA	Module power up and idle DRX cycle = 8 (2.56s)
GSM/GPRS/EDGE	GSM bands	64	mA	Module power up and idle MFRMS = 5 (1.175s)



**NOTE**

- In idle mode, the module is registered to the network, USB bus is active, and no voice or data call connection is ongoing.
- The above values are the average of some test samples.

**Table 5-8** DC power consumption (HSPA/WCDMA)

Description	Band	Test Value	Units	Power (dBm)
WCDMA MU509-b	Band I (IMT2100)	295	mA	1 dBm Tx Power
		320		10 dBm Tx Power
		535		24 dBm Tx Power
	Band VIII (900M)	195	mA	1 dBm Tx Power
		230		10 dBm Tx Power
		510		24 dBm Tx Power
WCDMA MU509-c	Band V (850M)	270	mA	1 dBm Tx Power
		290		10 dBm Tx Power
		570		24 dBm Tx Power
	Band II (PCS 1900)	185	mA	1 dBm Tx Power
		330		10 dBm Tx Power
		545		24 dBm Tx Power
WCDMA MU509-g	Band I (IMT2100)	293	mA	1dBm Tx Power
		321		10dBm Tx Power
		535		24dBm Tx Power
	Band V (850M)	267	mA	1dBm Tx Power
		289		10dBm Tx Power
		524		24dBm Tx Power
WCDMA HUAWEI MU509-1	Band I (IMT2100)	245	mA	1 dBm Tx Power
		290		10 dBm Tx Power
		585		24 dBm Tx Power
HSDPA MU509-b	Band I (IMT2100)	310	mA	1 dBm Tx Power
		340		10 dBm Tx Power
		550		24 dBm Tx Power
	Band VIII (900M)	215	mA	1 dBm Tx Power
		305		10 dBm Tx Power

Description	Band	Test Value	Units	Power (dBm)
		510		24 dBm Tx Power
HSDPA MU509-c	Band V (850M)	285	mA	1 dBm Tx Power
		315		10 dBm Tx Power
		540		24 dBm Tx Power
	Band II (PCS 1900)	195	mA	1 dBm Tx Power
		340		10 dBm Tx Power
		520		24 dBm Tx Power
HSDPA MU509-g	Band I (IMT2100)	311	mA	1dBm Tx Power
		338		10dBm Tx Power
		549		24dBm Tx Power
	Band V (850 M)	301	mA	1dBm Tx Power
		328		10dBm Tx Power
		598		24dBm Tx Power
HSDPA HUAWEI MU509-1	Band I (IMT2100)	260	mA	1 dBm Tx Power
		320		10 dBm Tx Power
		585		24 dBm Tx Power



The above values are the average of some test samples.

**Table 5-9** DC power consumption for MU509-b (GSM/GPRS/EDGE)

Description	Test Value	Units	PCL	Configuration
GPRS850	310	mA	5	1 Up/1 Down
	470			2 Up/1 Down
	690			4 Up/1 Down
	165	mA	10	1 Up/1 Down
	250			2 Up/1 Down
	410			4 Up/1 Down
GPRS900	290	mA	5	1 Up/1 Down



Description	Test Value	Units	PCL	Configuration
	440	mA	10	2 Up/1 Down
	625			4 Up/1 Down
	155		10	1 Up/1 Down
	235			2 Up/1 Down
	380			4 Up/1 Down
GPRS1800	212	mA	0	1 Up/1 Down
	310			2 Up/1 Down
	440			4 Up/1 Down
	110	mA	10	1 Up/1 Down
	145			2 Up/1 Down
	185			4 Up/1 Down
GPRS1900	215	mA	0	1 Up/1 Down
	315			2 Up/1 Down
	450			4 Up/1 Down
	120	mA	10	1 Up/1 Down
	155			2 Up/1 Down
	185			4 Up/1 Down
EDGE850	210	mA	8	1 Up/1 Down
	320			2 Up/1 Down
	410			4 Up/1 Down
	126	mA	15	1 Up/1 Down
	166			2 Up/1 Down
	223			4 Up/1 Down
EDGE900	185	mA	8	1 Up/1 Down
	285			2 Up/1 Down
	375			4 Up/1 Down
	115	mA	15	1 Up/1 Down
	155			2 Up/1 Down
	205			4 Up/1 Down
EDGE1800	175	mA	2	1 Up/1 Down
	265			2 Up/1 Down

Description	Test Value	Units	PCL	Configuration
	345	mA	10	4 Up/1 Down
	110			1 Up/1 Down
	145			2 Up/1 Down
	185			4 Up/1 Down
EDGE1900	176	mA	2	1 Up/1 Down
	255			2 Up/1 Down
	322			4 Up/1 Down
	117	mA	10	1 Up/1 Down
	148			2 Up/1 Down
	186			4 Up/1 Down

 **NOTE**

The above values are the average of some test samples.

**Table 5-10** DC power consumption for MU509-c (GSM/GPRS/EDGE)

Description	Test Value	Units	PCL	Configuration
GPRS850	300	mA	5	1 Up/1 Down
	515			2 Up/1 Down
	160	mA	10	1 Up/1 Down
	240			2 Up/1 Down
GPRS900	285	mA	5	1 Up/1 Down
	490			2 Up/1 Down
	155	mA	10	1 Up/1 Down
	235			2 Up/1 Down
GPRS1800	240	mA	0	1 Up/1 Down
	395			2 Up/1 Down
	115	mA	10	1 Up/1 Down
	150			2 Up/1 Down
GPRS1900	230	mA	0	1 Up/1 Down
	365			2 Up/1 Down
	125	mA	10	1 Up/1 Down



Description	Test Value	Units	PCL	Configuration
	160			2 Up/1 Down
EDGE850	195	mA	8	1 Up/1 Down
	310			2 Up/1 Down
	515			4 Up/1 Down
	115	mA	15	1 Up/1 Down
	155			2 Up/1 Down
	210			4 Up/1 Down
EDGE900	190	mA	8	1 Up/1 Down
	300			2 Up/1 Down
	495			4 Up/1 Down
	155	mA	10	1 Up/1 Down
	230			2 Up/1 Down
	355			4 Up/1 Down
EDGE1800	185	mA	2	1 Up/1 Down
	290			2 Up/1 Down
	475			4 Up/1 Down
	115	mA	10	1 Up/1 Down
	150			2 Up/1 Down
	195			4 Up/1 Down
EDGE1900	175	mA	2	1 Up/1 Down
	270			2 Up/1 Down
	430			4 Up/1 Down
	110	mA	10	1 Up/1 Down
	145			2 Up/1 Down
	190			4 Up/1 Down



The above values are the average of some test samples.



**Table 5-11 DC power consumption for MU509-g (GSM/GPRS/EDGE)**

Description	Test Value	Units	PCL	Configuration
GPRS850	310	mA	5	1 Up/1 Down
	470			2 Up/1 Down
	690			4 Up/1 Down
	165	mA	10	1 Up/1 Down
	250			2 Up/1 Down
	410			4 Up/1 Down
GPRS900	290	mA	5	1 Up/1 Down
	440			2 Up/1 Down
	625			4 Up/1 Down
	155	mA	10	1 Up/1 Down
	235			2 Up/1 Down
	380			4 Up/1 Down
GPRS1800	245	mA	0	1 Up/1 Down
	345			2 Up/1 Down
	480			4 Up/1 Down
	110	mA	10	1 Up/1 Down
	145			2 Up/1 Down
	185			4 Up/1 Down
GPRS1900	215	mA	0	1 Up/1 Down
	315			2 Up/1 Down
	450			4 Up/1 Down
	120	mA	10	1 Up/1 Down
	155			2 Up/1 Down
	200			4 Up/1 Down
EDGE850	210	mA	8	1 Up/1 Down
	320			2 Up/1 Down
	410			4 Up/1 Down
	126	mA	15	1 Up/1 Down
	166			2 Up/1 Down
	223			4 Up/1 Down



Description	Test Value	Units	PCL	Configuration
EDGE900	185	mA	8	1 Up/1 Down
	285			2 Up/1 Down
	375			4 Up/1 Down
	115	mA	15	1 Up/1 Down
	155			2 Up/1 Down
	205			4 Up/1 Down
EDGE1800	175	mA	2	1 Up/1 Down
	265			2 Up/1 Down
	345			4 Up/1 Down
	110	mA	10	1 Up/1 Down
	145			2 Up/1 Down
	185			4 Up/1 Down
EDGE1900	176	mA	2	1 Up/1 Down
	255			2 Up/1 Down
	322			4 Up/1 Down
	117	mA	10	1 Up/1 Down
	148			2 Up/1 Down
	186			4 Up/1 Down

**Table 5-12** DC power consumption for HUAWEI MU509-1 (GSM/GPRS/EDGE)

Description	Test Value	Units	PCL	Configuration
GPRS850	300	mA	5	1 Up/1 Down
	450			2 Up/1 Down
	640			4 Up/1 Down
	162	mA	10	1 Up/1 Down
	245			2 Up/1 Down
	385			4 Up/1 Down
GPRS900	325	mA	5	1 Up/1 Down
	500			2 Up/1 Down
	700			4 Up/1 Down



Description	Test Value	Units	PCL	Configuration
	165	mA	10	1 Up/1 Down
	255			2 Up/1 Down
	410			4 Up/1 Down
GPRS1800	215	mA	0	1 Up/1 Down
	310			2 Up/1 Down
	460			4 Up/1 Down
	113	mA	10	1 Up/1 Down
	145			2 Up/1 Down
	190			4 Up/1 Down
GPRS1900	230	mA	0	1 Up/1 Down
	350			2 Up/1 Down
	500			4 Up/1 Down
	115	mA	10	1 Up/1 Down
	150			2 Up/1 Down
	195			4 Up/1 Down
EDGE850	190	mA	8	1 Up/1 Down
	290			2 Up/1 Down
	375			4 Up/1 Down
	120	mA	15	1 Up/1 Down
	160			2 Up/1 Down
	210			4 Up/1 Down
EDGE900	205	mA	8	1 Up/1 Down
	310			2 Up/1 Down
	400			4 Up/1 Down
	120	mA	15	1 Up/1 Down
	160			2 Up/1 Down
	220			4 Up/1 Down
EDGE1800	185	mA	2	1 Up/1 Down
	265			2 Up/1 Down
	345			4 Up/1 Down
	110	mA	10	1 Up/1 Down

Description	Test Value	Units	PCL	Configuration
	145			2 Up/1 Down
	190			4 Up/1 Down
EDGE1900	190	mA	2	1 Up/1 Down
	280			2 Up/1 Down
	355			4 Up/1 Down
	115	mA	10	1 Up/1 Down
	150			2 Up/1 Down
	195			4 Up/1 Down

 **NOTE**

The above values are the average of some test samples.

## 5.6 Reliability Features

Table 5-13 lists the test conditions and results of the mechanical reliability of the MU509 module.

**Table 5-13** Test conditions and results of the mechanical reliability of the MU509 module

Item	Test Condition	Standard
Low-temperature storage	Temperature: $-40^{\circ}\text{C}\pm2^{\circ}\text{C}$ Test duration: 24 h	IEC60068
High-temperature storage	Temperature: $85^{\circ}\text{C}\pm2^{\circ}\text{C}$ Test duration: 24 h	IEC60068
Low-temperature working	Temperature: $-30^{\circ}\text{C}\pm2^{\circ}\text{C}$ Test duration: 24 h	IEC60068
High-temperature working	Temperature: $75^{\circ}\text{C}\pm2^{\circ}\text{C}$ Test duration: 24 h	IEC60068
Damp heat cycling	High temperature: $55^{\circ}\text{C}\pm2^{\circ}\text{C}$ Low temperature: $25^{\circ}\text{C}\pm2^{\circ}\text{C}$ Humidity: 95% Repetition times: 4 Test duration: 12 h+12 h	IEC60068



Item	Test Condition	Standard
Temperature shock	Low temperature: $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ High temperature: $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Temperature change interval: < 30s Test duration: 15 min Repetition times: 100	IEC60068
Salty fog test	Temperature: $35^{\circ}\text{C}$ Density of the NaCl solution: $5\% \pm 1\%$ Spraying interval: 8 h Duration of exposing the module to the temperature of $35^{\circ}\text{C}$ : 16 h	IEC60068
Sine vibration	Frequency range: 5 Hz to 200 Hz Acceleration: $10 \text{ m/s}^2$ Frequency scan rate: 1 oct/min Test period: 3 axial directions. Five circles for each axial direction.	IEC60068
Shock test	Half-sine wave shock Peak acceleration: $300 \text{ m/s}^2$ Shock duration: 11 ms Test period: 6 axial directions. One shock for each axial direction.	IEC60068
Clash test	Half-sine wave Peak acceleration: $180 \text{ m/s}^2$ Pulse duration: 6 ms Repetition time: 6 directions. 1000 times for each direction.	IEC60068
Drop test	First case: 0.3 m in height. Drop the MU509 module on the marble terrace with one surface facing downwards twice. Six surfaces should be tested. Second case: 0.8 m in height. Drop the MU509 module on the marble terrace with one surface facing downwards twice. Six surfaces should be tested.	IEC60068

## 5.7 EMC and ESD Features

EMC tests have to be performed on the application as soon as possible to detect any potential problems.

Special attention should be paid to the following:

- Possible harmful emissions radiated by the application to the RF receiver in the receiver band.
- ESD protection is mandatory on all signals which are externally accessible
- Typically, ESD protection is mandatory for the following:
  - SIM (if accessible from outside)
  - Serial link
  - USB
  - Audio
- Length of the SIM interface lines (preferably <10cm).
- EMC protection on audio input/output (filters against 900MHz emissions).
- Biasing of the microphone inputs.
- Ground plane: HUAWEI Wireless recommends a common ground plane for analog/digital/RF grounds.
- A metallic case or plastic casing with conductive paint is recommended, except for the area around the antenna.

Table 5-14 lists the test results of the ESD performance of the MU509 module according to the EN61000-4-2 standard.

**Table 5-14** MU509 ESD performance

ESD Test Standard	Contact Discharge	Air Discharge
EN61000-4-2	±4 kV	±8 kV



**NOTE**

The HUAWEI MU509 Module does not include any protection against over voltage.

# 6 Process Design

## 6.1 About This Chapter

This chapter describes the process design and mechanical specifications:

- Storage Requirement
- Moisture Sensitivity
- Dimensions and interfaces
- Packaging
- Label
- Customer PCB Design
- Assembly Processes
- Specification of Rework

## 6.2 Storage Requirement

The module must be stored and sealed properly in vacuum package under a temperature below 40°C and the relative humidity less than 90% in order to ensure the weldability within 12 months.

## 6.3 Moisture Sensitivity

- The moisture sensitivity is level 3.
- After unpacking, the module must be assembled within 168 hours under the environmental conditions that the temperature is lower than 30°C and the relative humidity is less than 60%. If the preceding conditions cannot be met, the module needs to be baked according to the parameters specified in Table 6-1 .

**Table 6-1** Baking parameters

Baking Temperature	Baking Condition	Baking Duration	Remarks
125±5°C	Relative humidity ≤ 60%	8 hours	


**NOTE**

Moving, storing, and processing the product must comply with IPC/JEDEC J-STD-033.

## 6.4 Dimensions and interfaces


Figure 6-1 shows the dimensions in details.

**Figure 6-1 Dimensions**

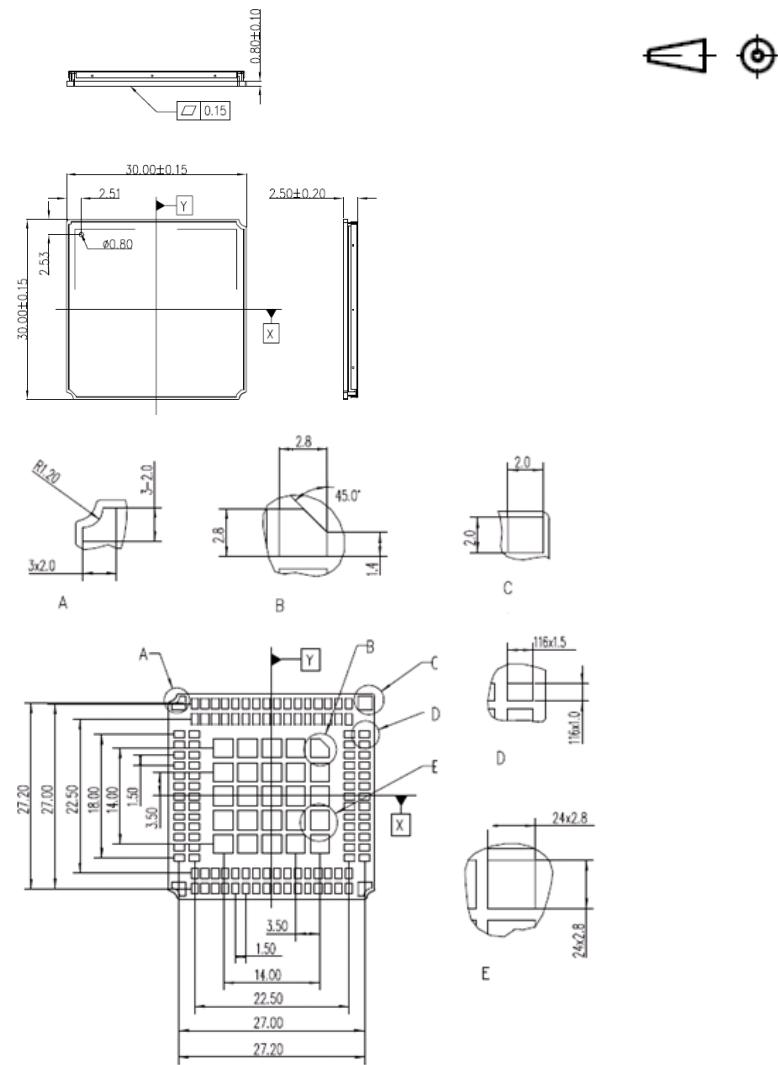

## 6.5 Packaging


HUAWEI LGA module uses five layers ESD pallet, anti-vibration foam and vacuum packing into cartons.

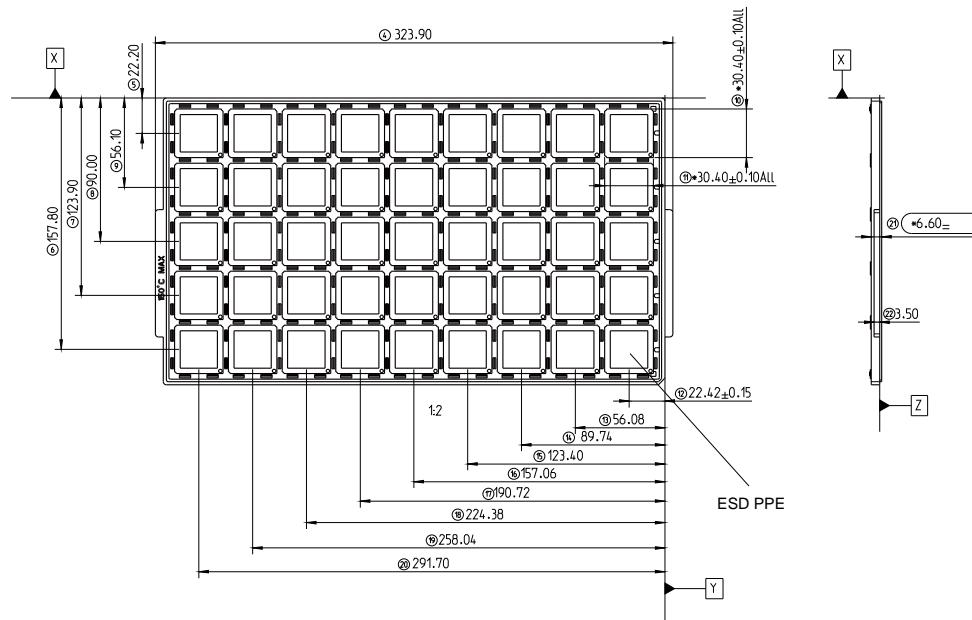

 **NOTE**

- All materials used must meet eco-friendly requirements.
- According to the requirements and test methods specified in EIA 541, the surface resistance must range from 10,000  $\Omega$  to 1000,000  $\Omega$ .
- Packaging materials must be resistant to temperature higher than or equal to 150°C.
- Triboelectricity must be lower than 100 V.

The following figure shows the packaging.

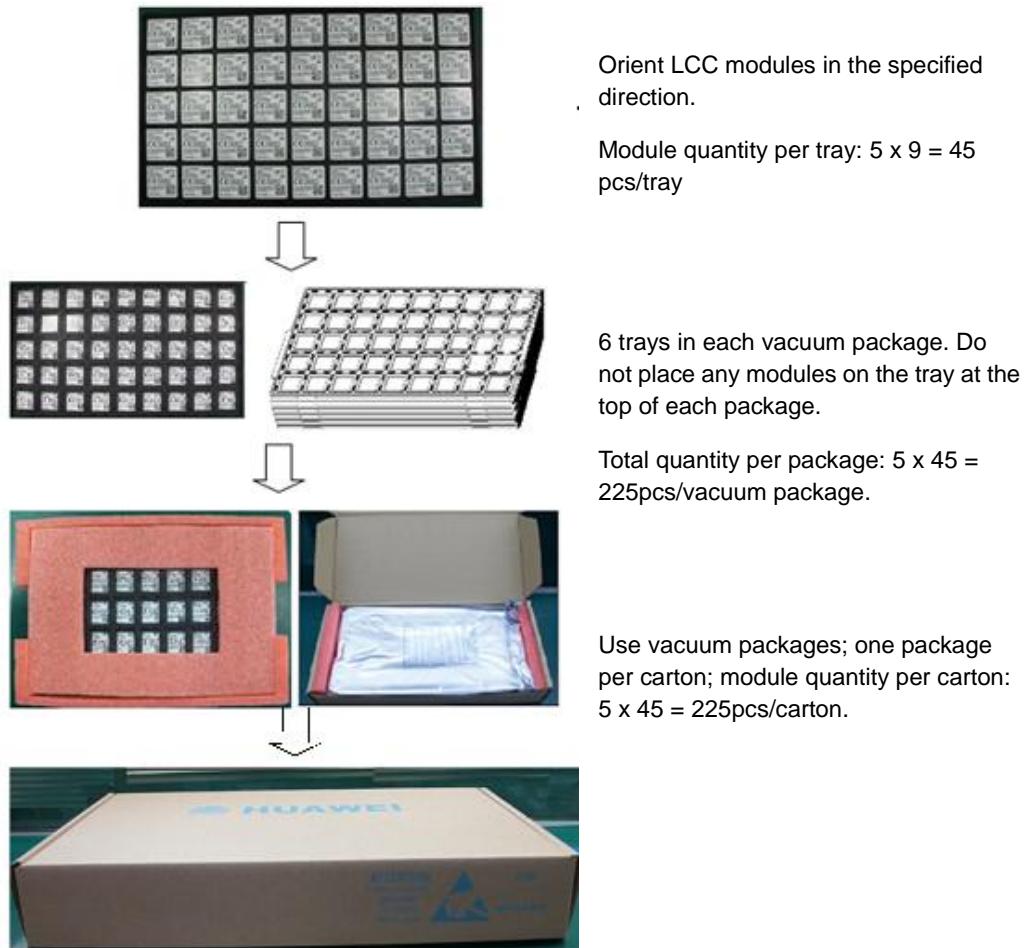


#### NOTE

- A secondary SMT assembly will be conducted on the LGA modules. To keep LGA modules dry and ensure a quality secondary SMT assembly, use vacuum packing for the LGA modules in accordance with the packing standards for Moisture Sensitivity Level (MSL) 3 components.
- Include desiccant and humidity indicators in the packages. Attach the packages with labels indicating that the LGA modules contained in the packages are MSL 3 components.
- Packages must be made of ESD materials. Packages or containers must be attached with ESD labels.


## 6.6 Label

The label is made from deformation-resistant, fade-resistant, and high-temperature-resistant material and is able to endure the high temperature of 260°C.

**Figure 6-2** Label for MU509-b, MU509-c and MU509-g

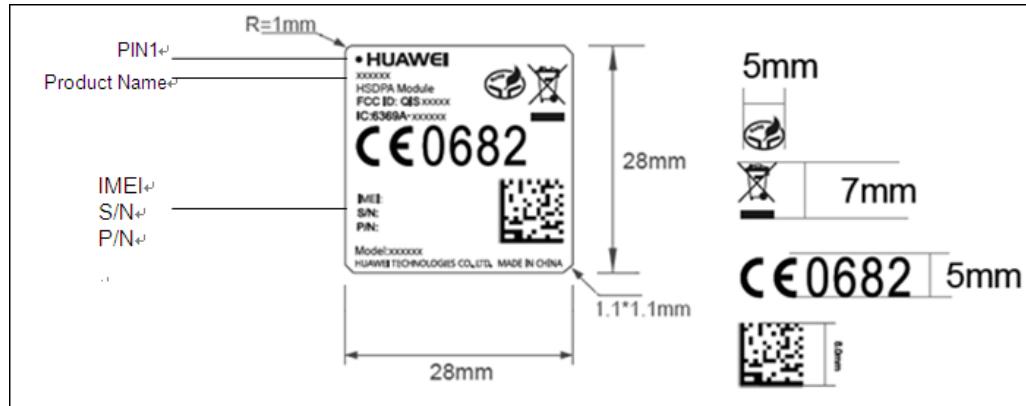

**Figure 6-3** Label for HUAWEI MU509-1

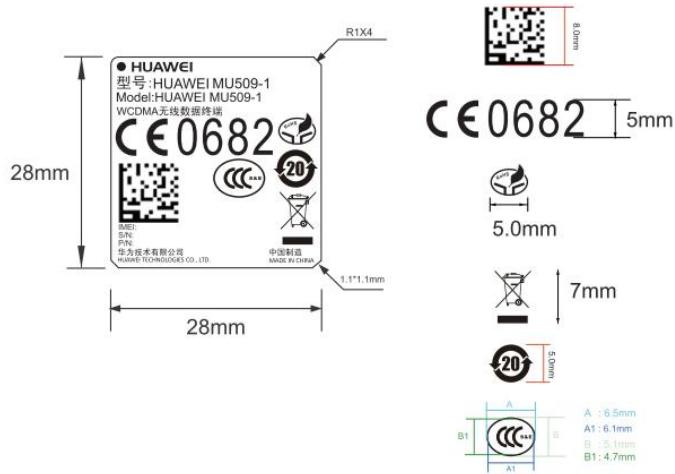

#### NOTE

- The picture mentioned above is only for reference.
- The silk-screen should be clear, without burrs, and dimension should be accurate.
- The material and surface finishing and coatings which used have to make satisfied with the EU WEEE and RoHS directives.
- The label must be heated up for 20s–40s and able to endure the high temperature of 260 °C. And the color of the material of the nameplate can't change.
- For MU509-c module, the label in Figure 6-2 is the common label (there is the other label specified for MU509-c).

## 6.7 Customer PCB Design


## 6.7.1 PCB Surface Finish

The PCB surface finish recommended is Electroless Nickel, immersion Gold (ENIG). Organic Solderability Preservative (OSP) may also be used, ENIG preferred.

## 6.7.2 PCB Pad Design

To achieve assembly yields and solder joints of high reliability, it is recommended that the PCB pad size be designed as follows:

**Figure 6-4** Design of the solder pads on customers' PCBs (Unit: mm)

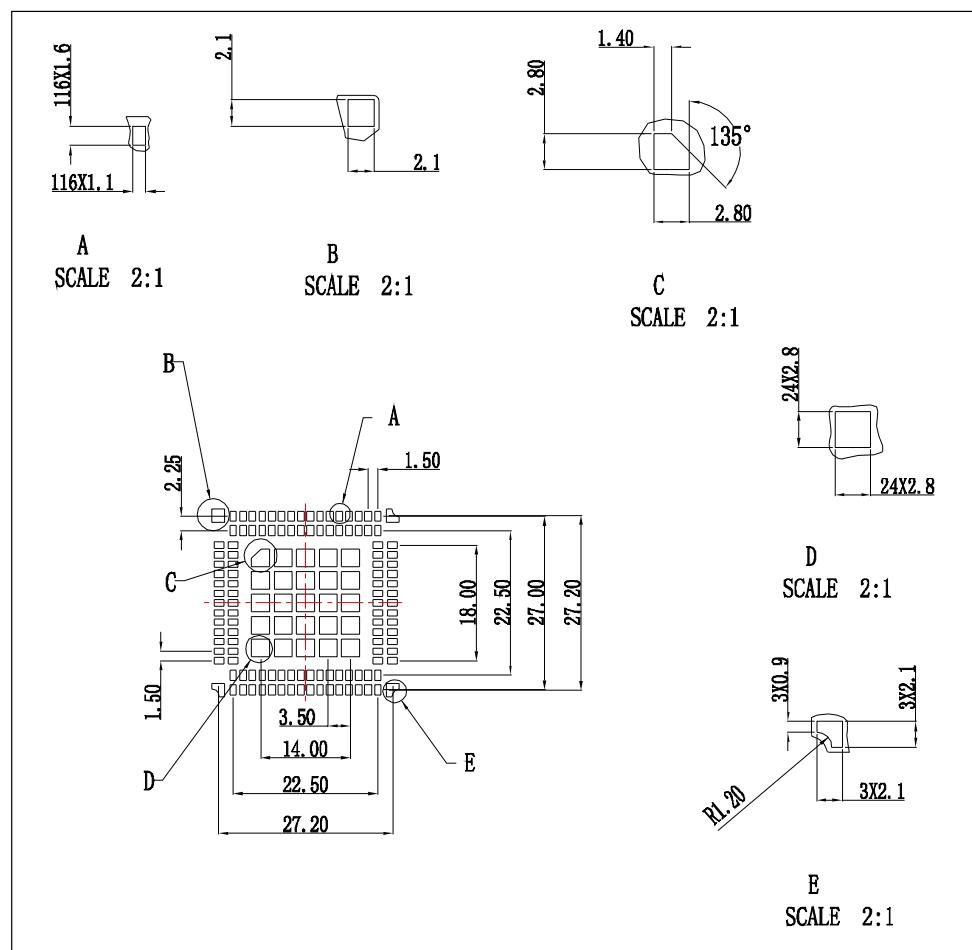

### 6.7.3 Solder Mask

NSMD is recommended. In addition, the solder mask of the NSMD pad design is larger than the pad so the reliability of the solder joint can be improved.

The solder mask must be 100  $\mu\text{m}$ –150  $\mu\text{m}$  larger than the pad, that is, the single side of the solder mask must be 50  $\mu\text{m}$ –75  $\mu\text{m}$  larger than the pad. The specific size depends on the processing capability of the PCB manufacturer.

## 6.7.4 Requirements on PCB Layout

- The PCB's minimum thickness is 0.8 mm. To reduce deformation, a thickness of at least 1.0 mm is recommended.
- Other devices must be located more than 3 mm (5 mm recommended) away from the LGA module. The minimum distance between the LGA module and the PCB edge is 1.5 mm.
- When the PCB layout is double sided, it is recommended that the LGA module be placed on the second side for assembly; so as to avoid module dropped from PCB or component(located in module) re-melding defects caused by uneven weight.


## 6.8 Assembly Processes

### 6.8.1 General Description of Assembly Processes

- Tray modules are required at SMT lines, because LGA modules are placed on ESD pallets.
- Reflow ovens with at least seven temperature zones are recommended.
- Use reflow ovens or rework stations for soldering, because LGA modules have large solder pads and cannot be soldered manually.

### 6.8.2 Stencil Design


It is recommended that the stencil for the LGA module be 0.12 mm in thickness. For the stencil design, see the following figure:

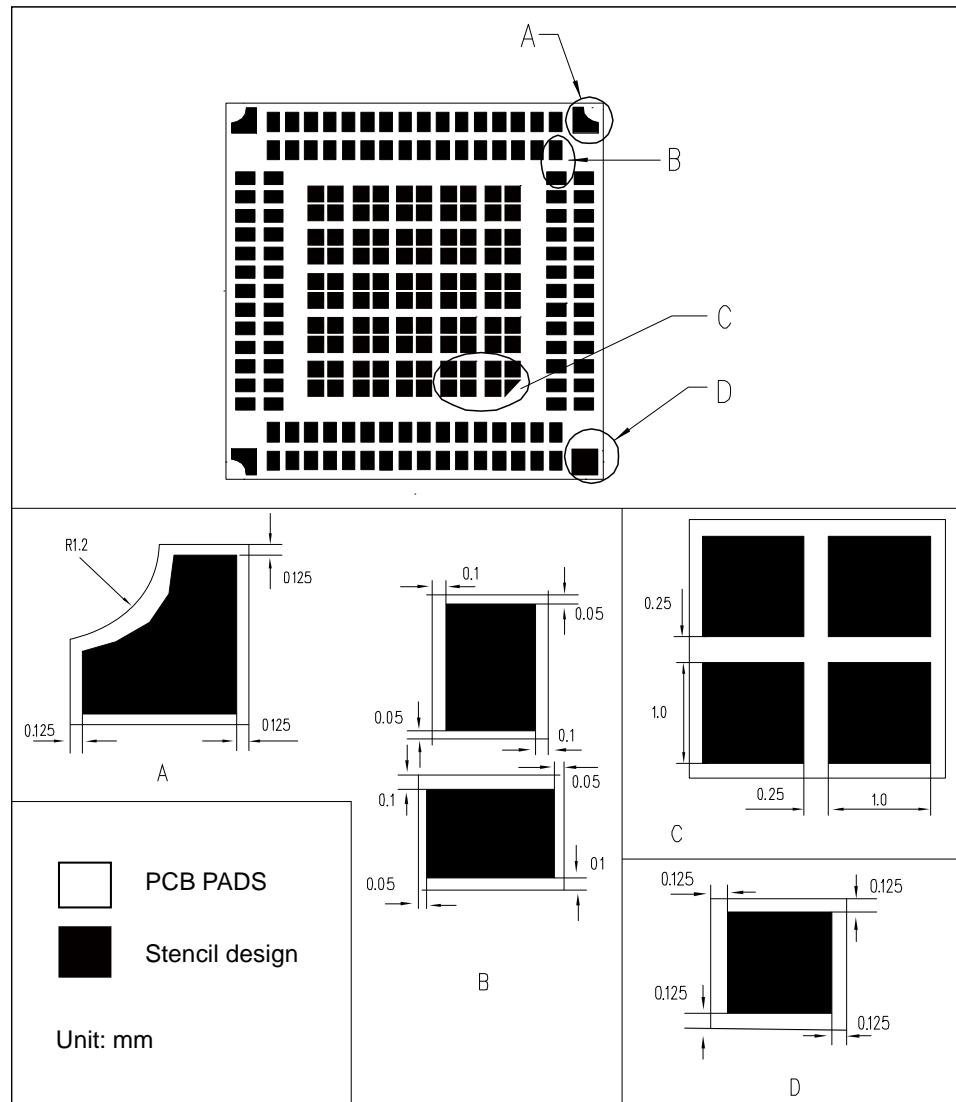**Figure 6-5** Recommended stencil design of LGA module**NOTE:**

The stencil design has been qualified for HUAWEI mainboard assembly, customers can adjust the parameters by their motherboard design and process situation to assure LGA soldering quality and no defect.

### 6.8.3 Reflow Profile


For the soldering temperature of the LGA module, see the following figure.

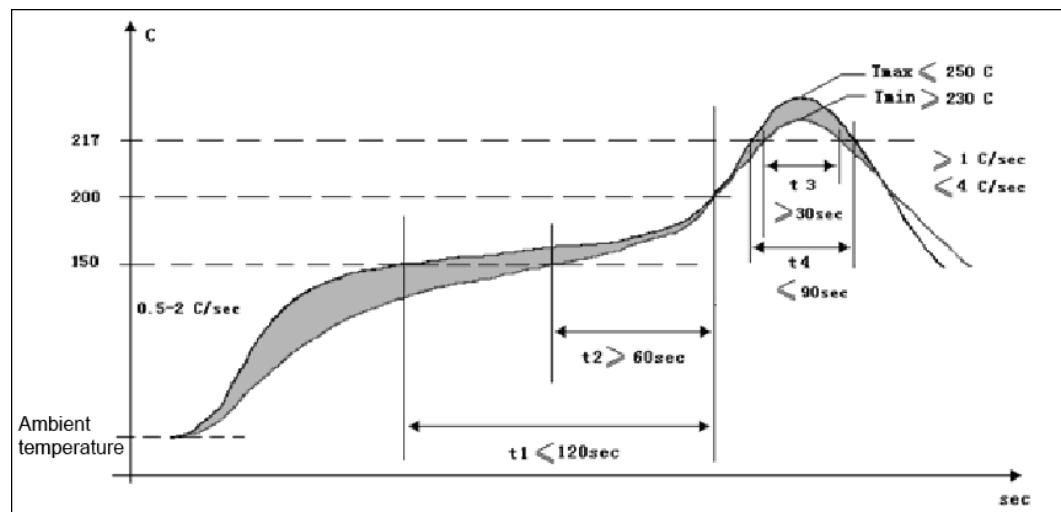**Figure 6-6** Reflow profile

**Table 6-2** Reflow parameters

Temperature Zone	Time	Key Parameter
Preheat zone (40°C–150°C)	60s–120s	Heating rate: 0.5°C/s–2°C/s
Soak zone (150°C–200°C)	(t1–t2): 60s–120s	Heating rate: < 1.0°C/s
Reflow zone (> 217°C)	(t3–t4): 30s–90s	Peak reflow temperature: 230°C–250°C
Cooling zone		Cooling rate: 1 °C/s ≤ Slope ≤ 4 °C/s

## 6.9 Specification of Rework
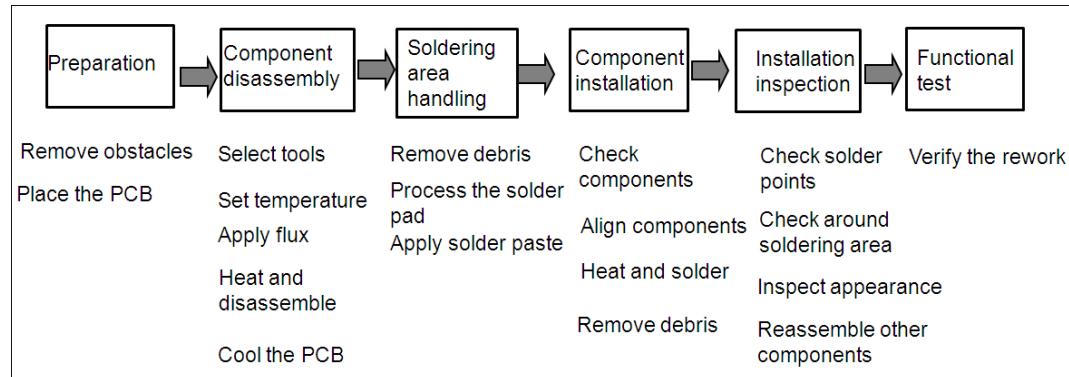
### 6.9.1 Process of Rework



### 6.9.2 Preparations of Rework


- Remove barrier or devices that can't stand high temperature before rework.
- If the device to be reworked is beyond the storage period, bake the device according to Table 6-1 .

### 6.9.3 Removing of the Module

The solder is molten and reflowed through heating during the module removing process. The heating rate must be quick but controllable in order to melt all the solder joints simultaneously. Pay attention to protect the module, PCB, neighboring devices, and their solder joints against heating or mechanical damages.

#### NOTE

- The LGA module has many solder pads and the pads are large. Therefore, common soldering irons and heat guns cannot be used in the rework. Rework must be done using either infrared heating rework stations or hot air rework stations. Infrared heating rework stations are preferred, because they can heat components without touching them. In addition, infrared heating rework stations produce less solder debris and less impact on modules, while hot air rework stations may cause shift of other components not to be reworked.
- It is proposed that a special clamp is used to remove the module.

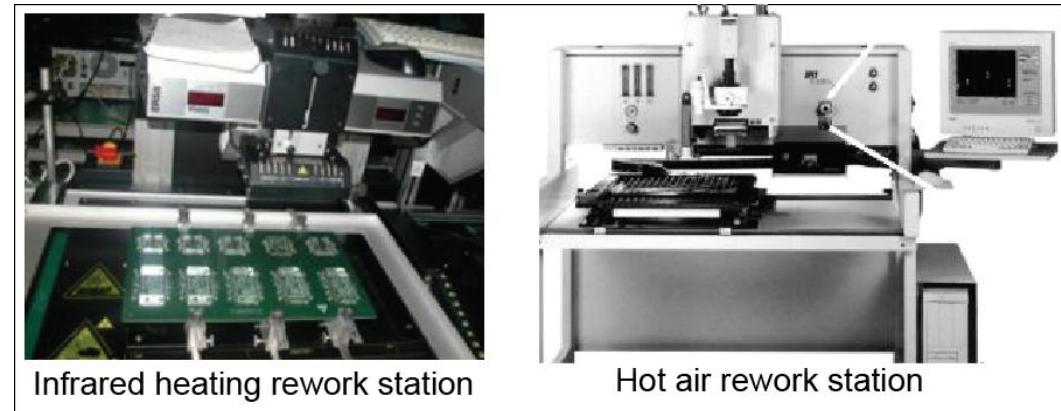**Figure 6-7** Equipment used for rework

Infrared heating rework station

Hot air rework station

## 6.9.4 Welding Area Treatment

- Step 1 Remove the old solder by using a soldering iron and solder braid that can wet the solder.
- Step 2 Clean the pad and remove the flux residuals.
- Step 3 Solder pre-filling: Before the module is installed on a board, apply some solder paste to the pad of the module by using the rework fixture and stencil or apply some solder paste to the pad on the PCB by using a rework stencil.

**NOTE**

It is recommended that a fixture and a mini-stencil be made to apply the solder paste in the rework.

## 6.9.5 Module Installation

Install the module precisely on the module and ensure the right installation direction of the module and the reliability of the electrical connection with the PCB. It is recommended that the module be preheated in order to ensure that the temperature of all parts to be soldered is uniform during the reflow process. The solder quickly reflows upon heating so the parts are soldered reliably. The solder joints undergo proper reflow duration at a preset temperature to form a favorable Intermetallic Compound (IMC).


**NOTE**

- It is recommended that a special clamp be used to pick the module when the module is installed on the pad after applied with some solder.
- A special rework device must be used for the rework.

## 6.9.6 Specifications of Rework

Temperature parameter of rework: for either the removing or welding of the module, the heating rate during the rework must be equal to or smaller than  $3^{\circ}\text{C/s}$ , and the peak temperature between  $240^{\circ}\text{C}$ – $250^{\circ}\text{C}$ . The following parameters are recommended during the rework.

**Figure 6-8** Temperature graph of rework

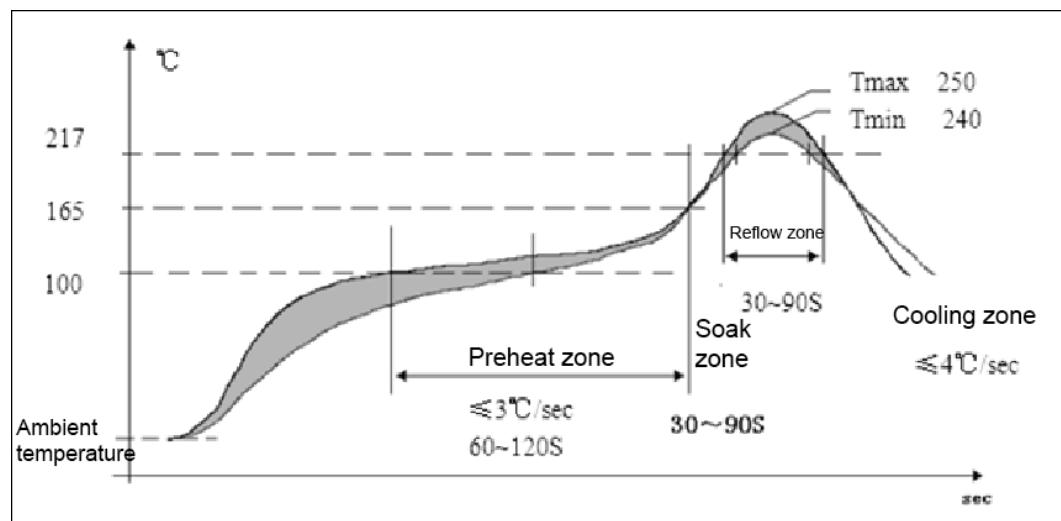



# 7 Certifications

## 7.1 About This Chapter

This chapter gives a general description of certifications for MU509.

## 7.2 Certifications

**Table 7-1** Product Certifications

Certification	Model name			
	MU509-b	MU509-c	MU509-g	HUAWEI MU509-1
CE number	CE0682	CE0682	CE0682	CE0682
FCC number	QISMU509B	QISMU509C	QISMU509G	
CCC	√	-	-	√
NCC	-	-	-	
A-TICK	-	-	√	
Jate&Telec	-	-	-	
IC number	6369A-MU509B	6369A-MU509C	-	
EU RoHS	√	√	√	
JGPSSI	-	-	-	
SGS RoHS	-	-	-	
PVC-Free	-	-	-	
GCF	√	-	-	
PTCRB	√	√	-	

# 8 Safety Information

Read the safety information carefully to ensure the correct and safe use of your wireless device. Applicable safety information must be observed.

## 8.1 Interference

Power off your wireless device if using the device is prohibited. Do not use the wireless device when it causes danger or interference with electric devices.

## 8.2 Medical Device

- Power off your wireless device and follow the rules and regulations set forth by the hospitals and health care facilities.
- Some wireless devices may affect the performance of the hearing aids. For any such problems, consult your service provider.
- Pacemaker manufacturers recommend that a minimum distance of 15 cm be maintained between the wireless device and a pacemaker to prevent potential interference with the pacemaker. If you are using an electronic medical device, consult the doctor or device manufacturer to confirm whether the radio wave affects the operation of this device.

## 8.3 Area with Inflammables and Explosives

To prevent explosions and fires in areas that are stored with inflammable and explosive devices, power off your wireless device and observe the rules. Areas stored with inflammables and explosives include but are not limited to the following:

- Gas station
- Fuel depot (such as the bunk below the deck of a ship)
- Container/Vehicle for storing or transporting fuels or chemical products
- Area where the air contains chemical substances and particles (such as granule, dust, or metal powder)
- Area indicated with the "Explosives" sign



- Area indicated with the "Power off bi-direction wireless equipment" sign
- Area where you are generally suggested to stop the engine of a vehicle

## 8.4 Traffic Security

- Observe local laws and regulations while using the wireless device. To prevent accidents, do not use your wireless device while driving.
- RF signals may affect electronic systems of motor vehicles. For more information, consult the vehicle manufacturer.
- In a motor vehicle, do not place the wireless device over the air bag or in the air bag deployment area. Otherwise, the wireless device may hurt you owing to the strong force when the air bag inflates.

## 8.5 Airline Security

Observe the rules and regulations of airline companies. When boarding or approaching a plane, power off your wireless device. Otherwise, the radio signal of the wireless device may interfere with the plane control signals.

## 8.6 Safety of Children

Do not allow children to use the wireless device without guidance. Small and sharp components of the wireless device may cause danger to children or cause suffocation if children swallow the components.

## 8.7 Environment Protection

Observe the local regulations regarding the disposal of your packaging materials, used wireless device and accessories, and promote their recycling.

## 8.8 WEEE Approval

The wireless device is in compliance with the essential requirements and other relevant provisions of the Waste Electrical and Electronic Equipment Directive 2002/96/EC (WEEE Directive).

## 8.9 RoHS Approval

The wireless device is in compliance with the restriction of the use of certain hazardous substances in electrical and electronic equipment Directive 2002/95/EC (RoHS Directive).



## 8.10 Laws and Regulations Observance

Observe laws and regulations when using your wireless device. Respect the privacy and legal rights of the others.

## 8.11 Care and Maintenance

It is normal that your wireless device gets hot when you use or charge it. Before you clean or maintain the wireless device, stop all applications and power off the wireless device.

- Use your wireless device and accessories with care and in clean environment. Keep the wireless device from a fire or a lit cigarette.
- Protect your wireless device and accessories from water and vapour and keep them dry.
- Do not drop, throw or bend your wireless device.
- Clean your wireless device with a piece of damp and soft antistatic cloth. Do not use any chemical agents (such as alcohol and benzene), chemical detergent, or powder to clean it.
- Do not leave your wireless device and accessories in a place with a considerably low or high temperature.
- Use only accessories of the wireless device approved by the manufacture. Contact the authorized service center for any abnormality of the wireless device or accessories.
- Do not dismantle the wireless device or accessories. Otherwise, the wireless device and accessories are not covered by the warranty.

## 8.12 Emergency Call

This wireless device functions through receiving and transmitting radio signals. Therefore, the connection cannot be guaranteed in all conditions. In an emergency, you should not rely solely on the wireless device for essential communications.

## 8.13 Specific Absorption Rate (SAR)

Your wireless device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for wireless devices is 2.0 W/kg and the highest SAR value for this device when tested complied with this limit.



## 8.14 Regulatory Information

The following approvals and notices apply in specific regions as noted.

### 8.14.1 CE Approval (European Union)

The wireless device is approved to be used in the member states of the EU. The wireless device is in compliance with the essential requirements and other relevant provisions of the Radio and Telecommunications Terminal Equipment Directive 1999/5/EC (R&TTE Directive).

Federal Communications Commission Notice (United States): Before a wireless device model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government-adopted requirement for safe exposure.

The SAR limit adopted by the USA and Canada is 1.6 watts/kilogram (W/kg) averaged over one gram of tissue. The highest SAR value reported to the FCC for this device type was compliant with this limit.

### 8.14.2 FCC Statement


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons.

**Warning:** Changes or modifications made to this equipment not expressly approved by HUAWEI may void the FCC authorization to operate this equipment.

# 9

## Appendix A Circuit of Typical Interface

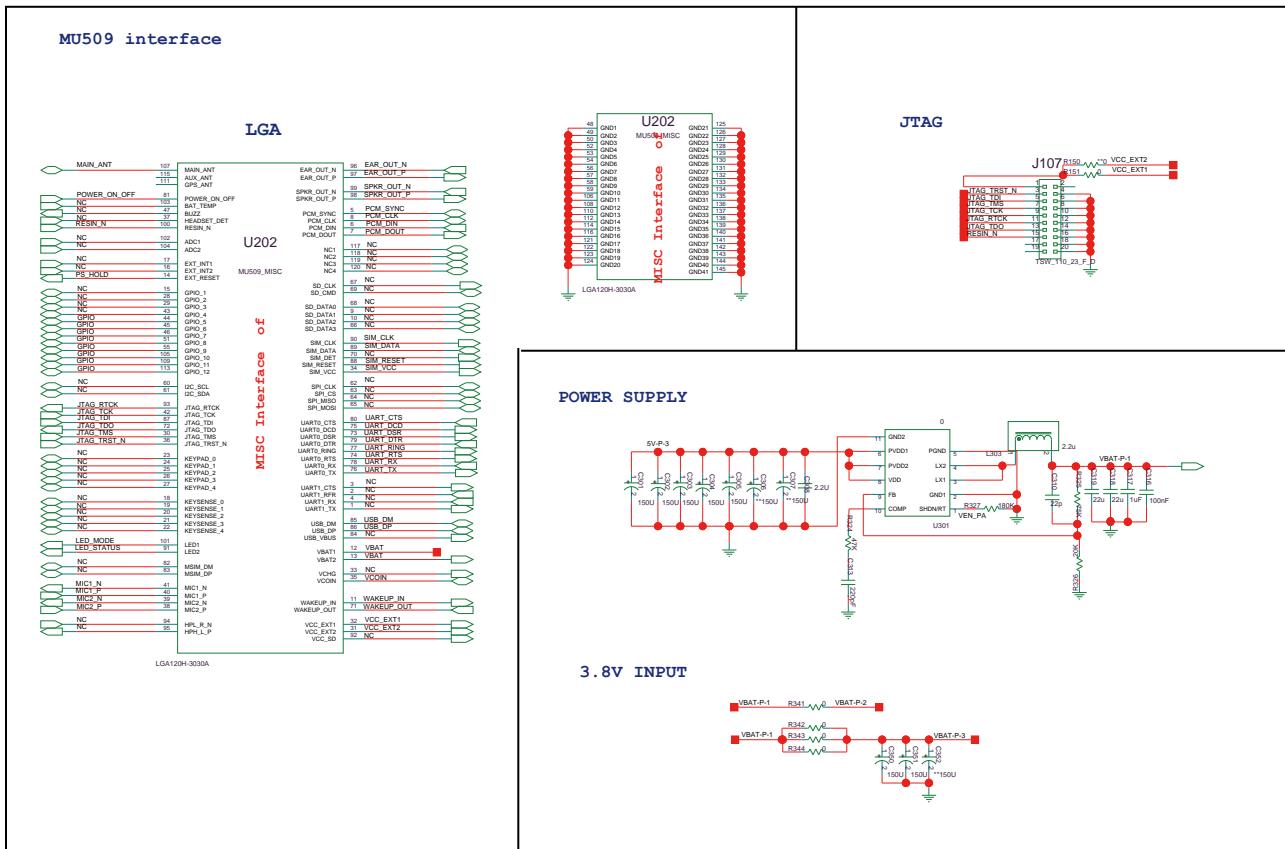

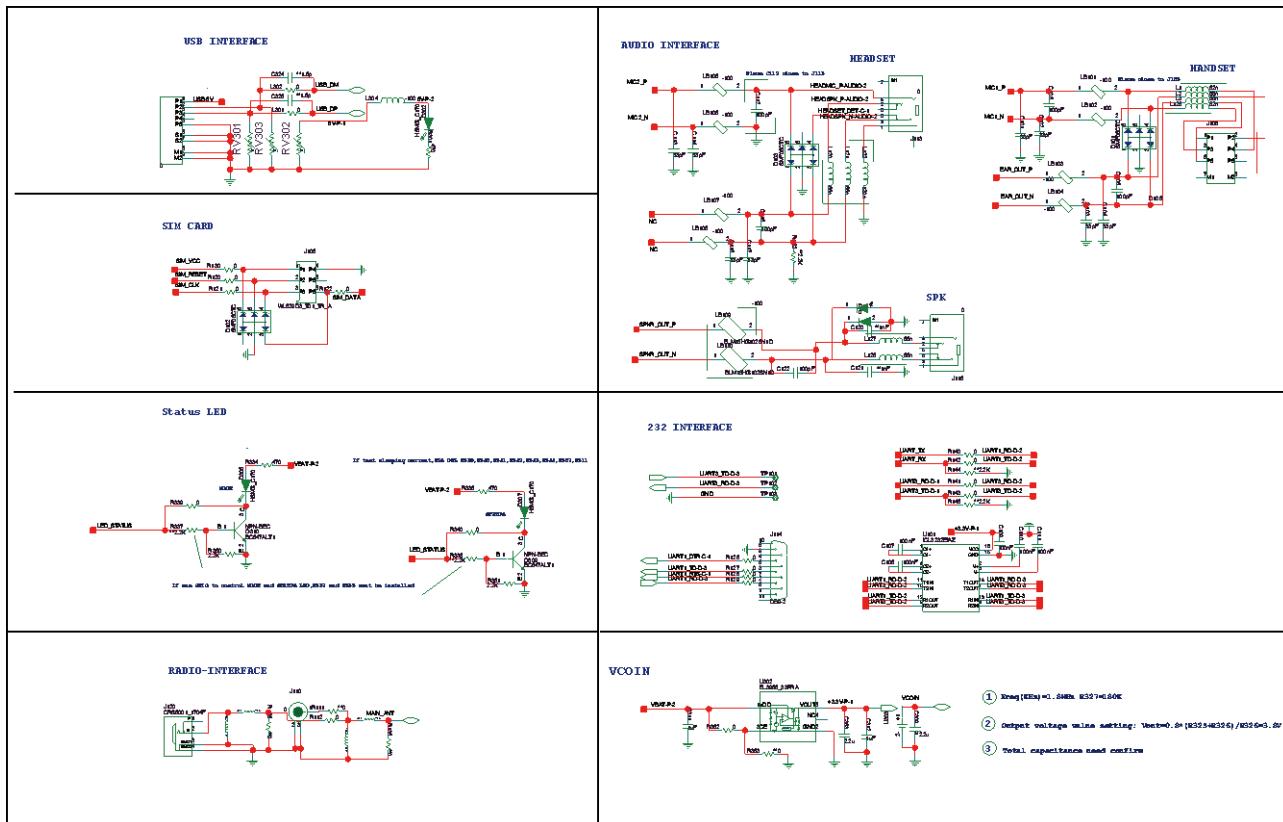



# 10

## Appendix B Acronyms and Abbreviations

Acronym or Abbreviation	Expansion
CE	European Conformity
CS	Coding Scheme
CSD	Circuit Switched Data
DC	Direct Current
DCE	Data Circuit-terminating Equipment
DMA	direct memory access
DTE	Data terminal Equipment
EIA	Electronic Industries Association
EMC	Electromagnetic Compatibility
ESD	Electrostatic Discharge
EU	European Union
FCC	Federal Communications Commission
FDD-TDMA	Frequency Division Duplexing-time Division Multiple Access
GMSK	Gaussian MinimumShift Keying
GPIO	General-purpose I/O
GPRS	General Packet Radio Service
ISO	International Standards Organization
LCP	Liquid Crystal Polyester
LDO	Low-Dropout
LED	Light-Emitting Diode



Acronym or Abbreviation	Expansion
MCP	Multi-chip Package
NTC	Negative Temperature Coefficient
PBCCH	Packet Broadcast Control Channel
PCB	Printed Circuit Board
PDU	Protocol Data Unit
RF	Radio Frequency
RoHS	Restriction of the Use of Certain Hazardous Substances
RTC	Real-time Clock
SIM	Subscriber Identity Module
TTL	Transistor-transistor Logic
TVS	Transient Voltage Suppressor
UART	Universal Asynchronous Receiver-Transmitter
USIM	Universal Subscriber Identity Module
VSWR	Voltage Standing Wave Ratio
WCDMA	Wideband CODE Division Multiple Access