

1. Kit Contents

The C8051F33x Development Kit contains the following items:

- C8051F330 Target Board
- Serial Adapter (RS232 to Target Board Debug Interface Protocol Converter)
- Cygnal IDE and Product Information CD-ROM. CD content includes:
 - Cygnal Integrated Development Environment (IDE)
 - Keil 8051 Development Tools (macro assembler, linker, evaluation 'C' compiler)
 - Installation Utility (SETUP.EXE)
 - Source code examples and register definition file
 - Documentation
- AC to DC Power Adapter
- RS232 Serial Cable
- 7" Ribbon Cable
- Quick-start Guide
- C8051F33x Development Kit User's Guide (this document)

2. Hardware Setup

The target board is connected to a PC running the Cygnal IDE via the Serial Adapter as shown in Figure 1.

1. Connect one end of the RS232 serial cable to a Serial (COM) Port on the PC.
2. Connect the other end of the RS232 serial cable to the DB-9 connector on the Serial Adapter.
3. Connect the Serial Adapter to the DEBUG connector on the target board with the 10-pin ribbon cable.
4. Connect the AC/DC power adapter to power jack P1 on the target board.

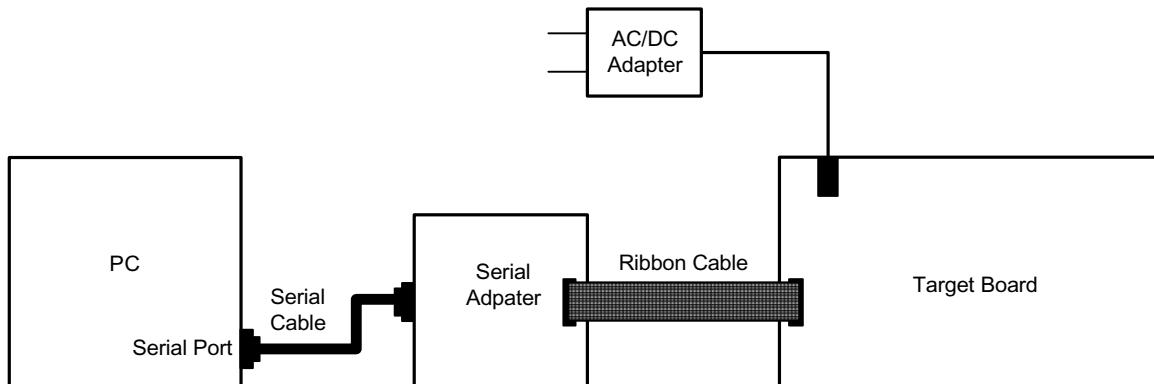


Figure 1. Hardware Setup

Note: The Reset switch on the target board is disabled when the serial adapter is connected to the target board. Use the **Reset** button in the Cygnal IDE toolbar to reset the target when connected to the Serial Adapter.



3. Software Setup

The included CD-ROM contains the Cygnal Integrated Development Environment (IDE), Keil software 8051 tools and additional documentation. Insert the CD-ROM into your PC's CD-ROM drive. An installer will automatically launch, allowing you to install the IDE software or read documentation by clicking buttons on the Installation Panel. If the installer does not automatically start when you insert the CD-ROM, run "autorun.exe" found in the root directory of the CD-ROM. Refer to the "readme.txt" file on the CD-ROM for the latest information regarding known IDE problems and restrictions.

4. CYGNAL Integrated Development Environment

The Cygnal IDE integrates a source-code editor, source-level debugger and in-system Flash programmer. The use of third-party compilers and assemblers is also supported. This development kit includes the Keil Software A51 macro assembler, BL51 linker and evaluation version C51 'C' compiler. These tools can be used from within the Cygnal IDE.

4.1. System Requirements

The Cygnal IDE requirements:

- Pentium-class host PC running Microsoft Windows 95 or later, or Microsoft Windows NT or later.
- One available COM port (1-4).
- 64 MB RAM and 40MB free HD space recommended.

4.2. Assembler and Linker

A full-version Keil A51 macro assembler and BL51 banking linker are included with the development kit and are installed during IDE installation. The complete assembler and linker reference manual can be found on-line under the **Help** menu in the IDE or in the "Cygnal\hlp" directory (A51.pdf).

4.3. Evaluation C51 'C' Compiler

An evaluation version of the Keil C51 'C' compiler is included with the development kit and is installed during IDE installation. The evaluation version of the C51 compiler is the same as the full professional version except code size is limited to 4K bytes and the floating point library is not included. The C51 compiler reference manual can be found under the **Help** menu in the IDE or in the "Cygnal\hlp" directory (C51.pdf).

4.4. Using the Keil Software 8051 Tools with the Cygnal IDE

To perform source-level debugging with the IDE, you must configure the Keil 8051 tools to generate an absolute object file in the OMF-51 format with object extensions and debug records enabled. You may build the OMF-51 absolute object file by calling the Keil 8051 tools at the command line (e.g. batch file or make file) or by using the project manager built into the IDE. The default configuration when using the Cygnal IDE project manager enables object extension and debug record generation. Refer to Applications Note **AN004 - Integrating Keil 8051 Tools Into the Cygnal IDE** in the "Documentation" directory on the CD-ROM for additional information on using the Keil 8051 tools with the Cygnal IDE.

To build an absolute object file using the Cygnal IDE project manager, you must first create a project. A project consists of a set of files, IDE configuration, debug views, and a target build configuration (list of files and tool configurations used as input to the assembler, compiler, and linker when building an output object file).



The following sections illustrate the steps necessary to manually create a project with one or more source files, build a program and download the program to the target in preparation for debugging. (The IDE will automatically create a single-file project using the currently open and active source file if you select **Build/Make Project** before a project is defined.)

4.4.1. Creating a New Project

1. Select **Project->New Project** to open a new project and reset all configuration settings to default.
2. Select **File->New File** to open an editor window. Create your source file(s) and save the file(s) with a recognized extension, such as .c, .h, or .asm, to enable color syntax highlighting.
3. Right-click on “New Project” in the **Project Window**. Select **Add files to project**. Select files in the file browser and click Open. Continue adding files until all project files have been added.
4. For each of the files in the **Project Window** that you want assembled, compiled and linked into the target build, right-click on the file name and select **Add file to build**. Each file will be assembled or compiled as appropriate (based on file extension) and linked into the build of the absolute object file.

Note: If a project contains a large number of files, the “Group” feature of the IDE can be used to organize. Right-click on “New Project” in the **Project Window**. Select **Add Groups to project**. Add pre-defined groups or add customized groups. Right-click on the group name and choose **Add file to group**. Select files to be added. Continue adding files until all project files have been added.

4.4.2. Building and Downloading the Program for Debugging

1. Once all source files have been added to the target build, build the project by clicking on the **Build/Make Project** button in the toolbar or selecting **Project->Build/Make Project** from the menu.
2. C8051F33x family devices use the Cygnal 2-wire (C2) debug interface. You must select **Cygnal 2-Wire** in the **Options->Debug Interface** menu to enable connection to C8051F33x target devices. Click the **Connect** button in the toolbar or select **Debug->Connect** from the menu to connect to the device.
3. Download the project to the target by clicking the **Download Code** button in the toolbar.

Note: To enable automatic downloading if the program build is successful select **Enable automatic connect/download after build** in the **Project->Target Build Configuration** dialog. If errors occur during the build process, the IDE will not attempt the download.

4. Save the project when finished with the debug session to preserve the current target build configuration, editor settings and the location of all open debug views. To save the project, select **Project->Save Project As...** from the menu. Create a new name for the project and click on **Save**.



5. Example Source Code

Example source code and register definition files are provided in the “*Examples\C8051F33x*” directory during IDE installation. These files may be used as a template for code development. Example applications include a blinking LED example which configures the green LED on the target to blink at a fixed rate.

5.1. Register Definition Files

Register definition files *C8051F330.inc* and *C8051F330.h* define all SFR registers and bit-addressable control/status bits. They are installed into the “*Examples\C8051F33x*” directory during IDE installation. The register and bit names are identical to those used in the C8051F33x datasheet. Both register definition files are also installed in the default search path used by the Keil Software 8051 tools. Therefore, when using the Keil 8051 tools included with the development kit (A51, C51), it is not necessary to copy a register definition file to each project’s file directory.

5.2. Blinking LED Example

The example source files *blink.asm* and *blinky.c* show examples of several basic C8051F33x functions. These include; disabling the watchdog timer (WDT), configuring the Port I/O crossbar, configuring a timer for an interrupt routine, initializing the system clock, and configuring a GPIO port. When compiled/assembled and linked this program flashes the green LED on the C8051F330 target board about five times a second using the interrupt handler with a C8051F330 timer.

6. Target Board

The C8051F33x Development Kit includes a target board with a C8051F330 device pre-installed for evaluation and preliminary software development. Numerous input/output (I/O) connections are provided to facilitate prototyping using the target board. Refer to Figure 2 for the locations of the various I/O connectors.

| | |
|---------|----------------------------------------------------------------------------|
| P1 | Power connector (accepts input from 7 to 15 VDC unregulated power adapter) |
| J1 | 22-pin Expansion I/O connector |
| J3 | Port I/O Configuration Jumper Block |
| J4 | DEBUG connector for Serial Adapter interface |
| J5 | DB-9 connector for UART0 RS232 interface |
| P2 | Analog I/O terminal block |
| J6 | Connects IDAC to P0.1 pin |
| J8 | Serial Adapter target board power connector |
| J9, J10 | External crystal enable connectors |

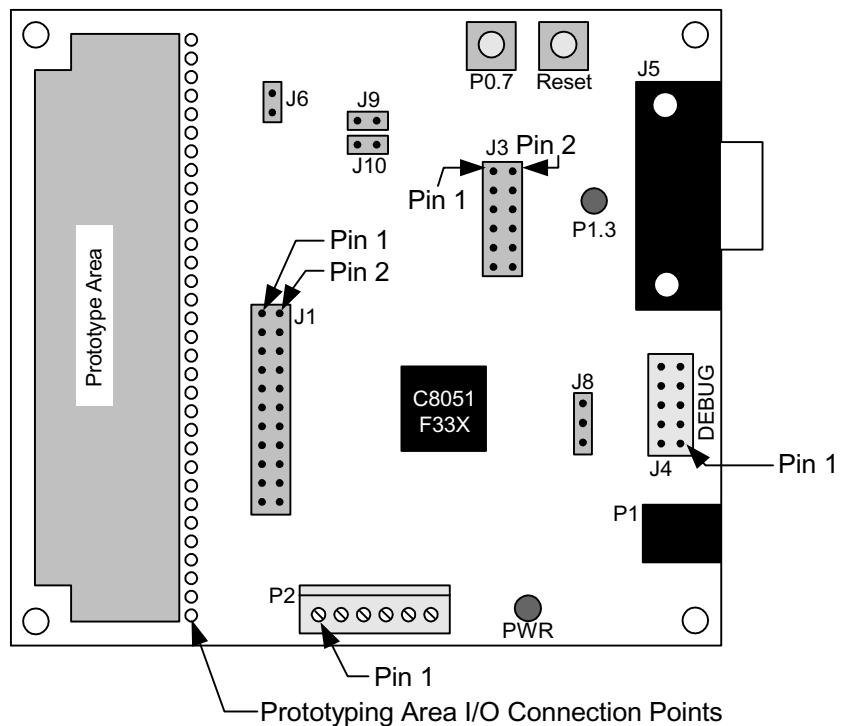


Figure 2. C8051F330 Target Board



6.1. System Clock Sources

The C8051F330 device installed on the target board features a calibrated programmable internal oscillator which is enabled as the system clock source on reset. After reset, the internal oscillator operates at a frequency of 3.0625MHz (+/-2%) by default but may be configured by software to operate at other frequencies. Therefore, in many applications an external oscillator is not required. However, if you wish to operate the C8051F330 device at a frequency not available with the internal oscillator, an external crystal may be used. Refer to the C8051F33x datasheet for more information on configuring the system clock source.

The target board is designed to facilitate the installation of an external crystal. Remove jumpers J9 and J10 and install the crystal at the pads marked Y1. Install a 10MΩ resistor at R9 and install capacitors at C14 and C15 using values appropriate for the crystal you select. Refer to the C8051F33x datasheet for more information on the use of external oscillators.

6.2. Switches and LEDs

Two switches and two LEDs are provided on the target board. Switch SW1 is connected to the RESET pin of the C8051F330. Pressing SW1 puts the C8051F330 in its hardware-reset state. Switch SW2 is connected to the C8051F330's Port 0.7 (P0.7) general purpose I/O (GPIO) pin through jumper J3[3-4]. Pressing SW2 generates a logic low signal on the P0.7 pin. The P0.7 signal is also routed to a pin on the J1 I/O connector. Remove the shorting block from J3[3-4] to disconnect SW2 from P0.7.

The LED labeled PWR is used to indicate a power connection to the target board. The LED labeled P1.3 is connected to the C8051F330's Port 1.3 (P1.3) GPIO pin through jumper J3[1-2]. The P1.3 signal is also routed to a pin on the J1 I/O connector. Remove the shorting block from J3[1-2] to disconnect the LED from P1.3.

6.3. Expansion I/O Connector (J1)

The 22-pin Expansion I/O connector J1 provides access to all signal pins of the C8051F330 device. Pins for +3V, digital ground and the output of an on-board low-pass filter are also available. A small through-hole prototyping area is also provided. All I/O signals routed to connector J1 are also routed to through-hole connection points between J1 and the prototyping area (see Figure 2 on page 5). Each connection point is labeled indicating the signal available at the connection point.

| Pin # | Description | Pin # | Description |
|-------|----------------|-------|-------------|
| 1 | +3VD (+3.3VDC) | 12 | P1.1 |
| 2 | IDAC | 13 | P1.2 |
| 3 | P0.0 | 14 | P1.3 |
| 4 | P0.1 | 15 | P1.4 |
| 5 | P0.2 | 16 | P1.5 |
| 6 | P0.3 | 17 | P1.6 |
| 7 | P0.4 | 18 | P1.7 |
| 8 | P0.5 | 19 | P2.0 |
| 9 | P0.6 | 20 | RST/C2CLK |
| 10 | P0.7 | 21 | GND |
| 11 | P1.0 | 22 | GND |

Table 1. J1 Pin Descriptions



6.4. Serial Adapter Target Board Power Connector (J8)

The Serial Adapter includes a connection to provide power to the target board. This connection is routed from J4[10] to J8[1]. Place a jumper at J8[2-3] to power the board directly from an AC/DC power adapter. Place a jumper at J8[1-2] to power the board from the Serial Adapter. Please note that the second option is not supported with either the EC1 or EC2 Serial Adapters.

6.5. Target Board DEBUG Interface (J4)

The DEBUG connector (J4) provides access to the DEBUG pins of the C8051F330. It is used to connect the Serial Adapter to the target board for in-circuit debugging and Flash programming. Table 2 shows the DEBUG pin definitions.

| Pin # | Description |
|---------|----------------|
| 1 | +3VD (+3.3VDC) |
| 2, 3, 9 | GND (Ground) |
| 4 | C2DAT |
| 5 | /RST (Reset) |
| 6 | P3.0 |
| 7 | C2CK |
| 8 | Not Connected |
| 10 | J4_Pin_10 |

Table 2. DEBUG Connector Pin Descriptions

6.6. Serial Interface (J5)

A RS232 transceiver circuit and DB-9 (J5) connector are provided on the target board to facilitate serial connections to UART0 of the C8051F330. The TX, RX, RTS and CTS signals of UART0 may be connected to the DB-9 connector and transceiver by installing jumpers on J3.

- J3[5-6] - Install shorting block to connect UART0 TX (P0.4) to transceiver.
- J3[7-8] - Install shorting block to connect UART0 RX (P0.5) to transceiver.
- J3[9-10] - Install shorting block to connect UART0 RTS (P1.1) to transceiver.
- J3[11-12] - Install shorting block to connect UART0 CTS (P1.2) to transceiver.

6.7. Analog I/O (P2)

Several of the C8051F330 target device's port pins are connected to the J6 terminal block. Refer to Table 3 for the P2 terminal block connections.

| Pin # | Description |
|-------|---------------------------------|
| 1 | CNVSTR (P0.6) |
| 2 | IDAC |
| 3 | P1.5 |
| 4 | P1.4 |
| 5 | GND (Ground) |
| 6 | P0.0 / Vref (Voltage Reference) |

Table 3. P2 Terminal Block Pin Descriptions

6.8. IDAC Connector(J6)

The C8051F330 target board also features a Current-to-Voltage 1KΩ converting resistor that may be connected to the 10-bit current-mode Digital-to-Analog Converter (IDAC) on port pin (P0.1). Install a shorting block on J6 to connect the IDAC pin of the target device to the converting resistor. The IDAC signal is then routed to the J1[2] and P2[2] connectors.

7. Serial Adapter

The Serial Adapter provides the interface between the PC's RS232 serial port and the C8051F33x's in-system debug/programming circuitry. The Serial Adapter connects to the C8051F330 Cygnal 2-wire (C2) debug interface on the target board using the 10-pin connector on the Serial Adapter labeled "JTAG", see Figure 3. (The Serial Adapter supports both Cygnal JTAG and C2 debug interfaces.). All Serial Adapters may be powered from the target board, but the EC1 and EC2 Serial Adapter units can not provide power to the target board. Table 4 shows the pin definitions for the Serial Adapter's JTAG connector.

Notes:

1. When powering the Serial Adapter via the JTAG connector, the input voltage to the JTAG connector's power pin must be 3.0 to 3.6VDC. Otherwise, the Serial Adapter must be powered directly by connecting the AC/DC adapter to the Serial Adapter's DC power jack.
2. The Serial Adapter requires a target system clock of 32Khz or greater.

| Pin # | Description |
|----------|---------------------|
| 1 | 3.0 to 3.6VDC Input |
| 2 | GND (Ground) |
| 4 | TCK (C2DAT) |
| 5 | TMS |
| 6 | TDO |
| 7 | TDI (C2CLK) |
| 3,8,9,10 | Not Connected |

Table 4. DEBUG Connector Pin Descriptions

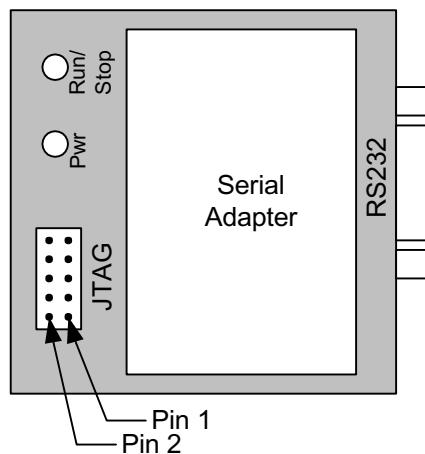


Figure 3. Serial Adapter JTAG Connector

8. Schematic

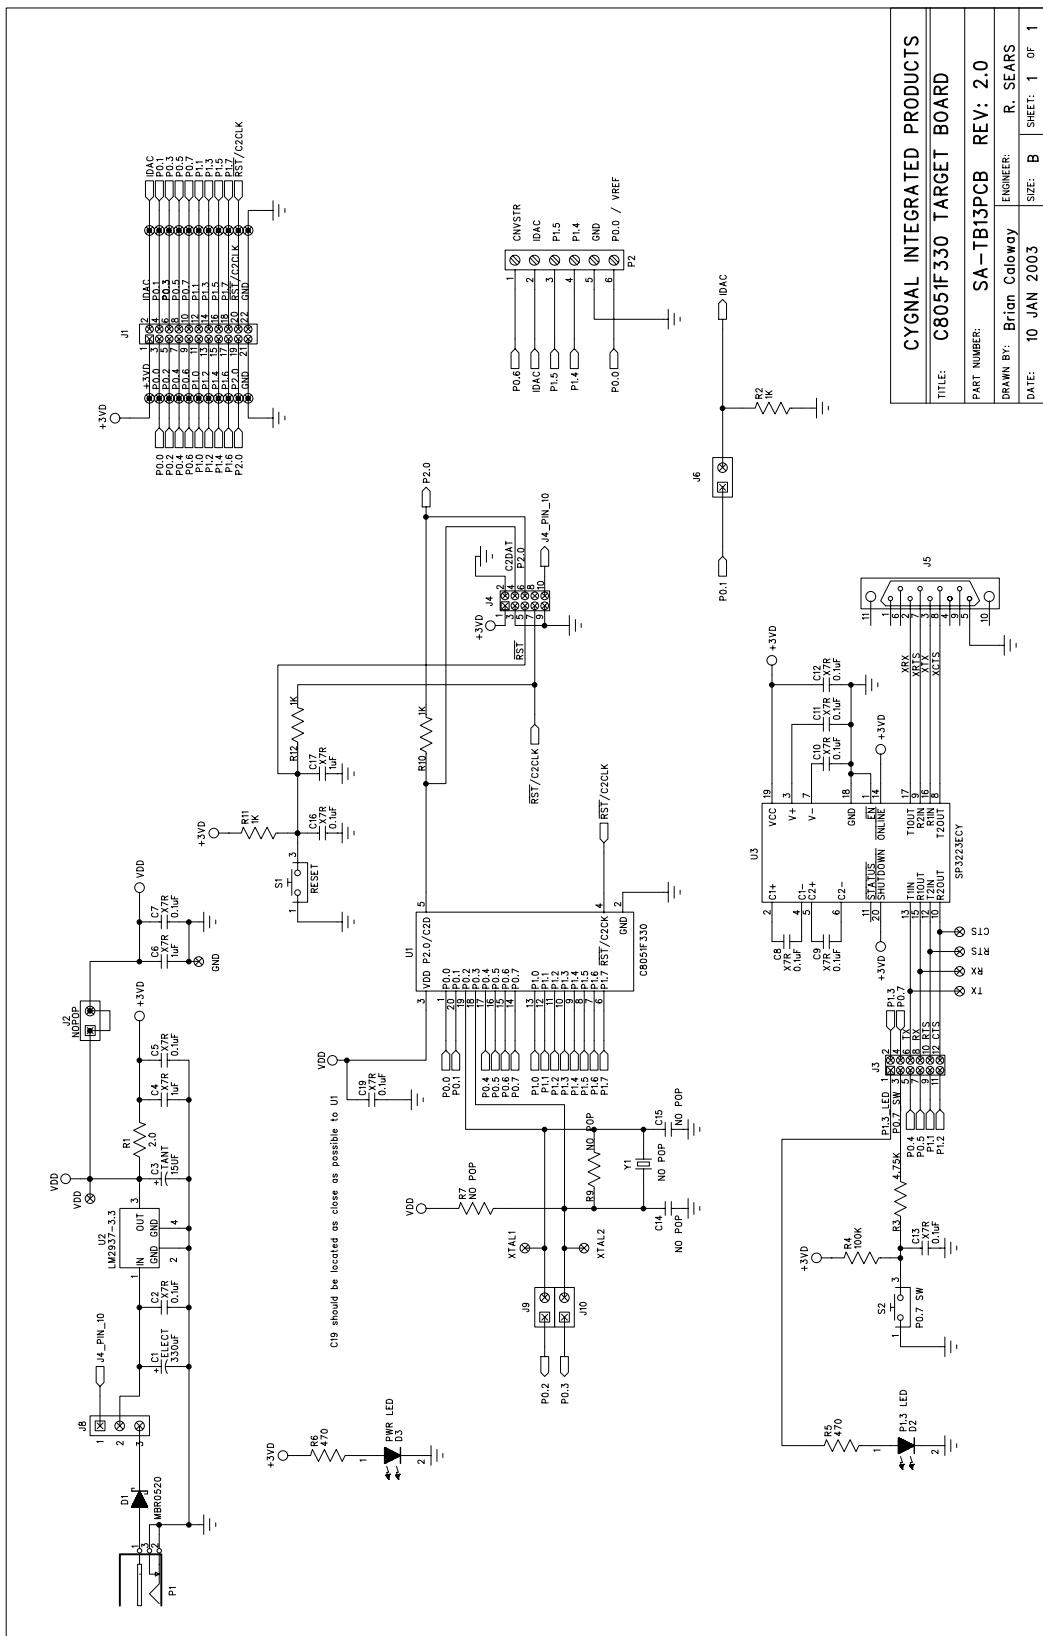


Figure 4. C8051F330 Target Board Schematic